BPF-3M-1M-L
Band Pass Filter
Center Frequency 3 MHz/SMA Female

BPF-3M-1M-L is a coaxial band-pass filter with a passband center frequency at 3 MHz and a rejection frequencies at f0±3 MHz . The maximum insertion loss of the filter is 6.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Center Frequency 3 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	2.5		3.5	MHz
Band Width			1	MHz
Insertion Loss(f0)			6.0	dB
Pass Band Ripple			5.5	dB
VSWR			1.6	:1
Rejection@f0±3MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-3M-1M-L
Band Pass Filter
Center Frequency 3 MHz/SMA Female

Outline Drawing:

Unit:mm

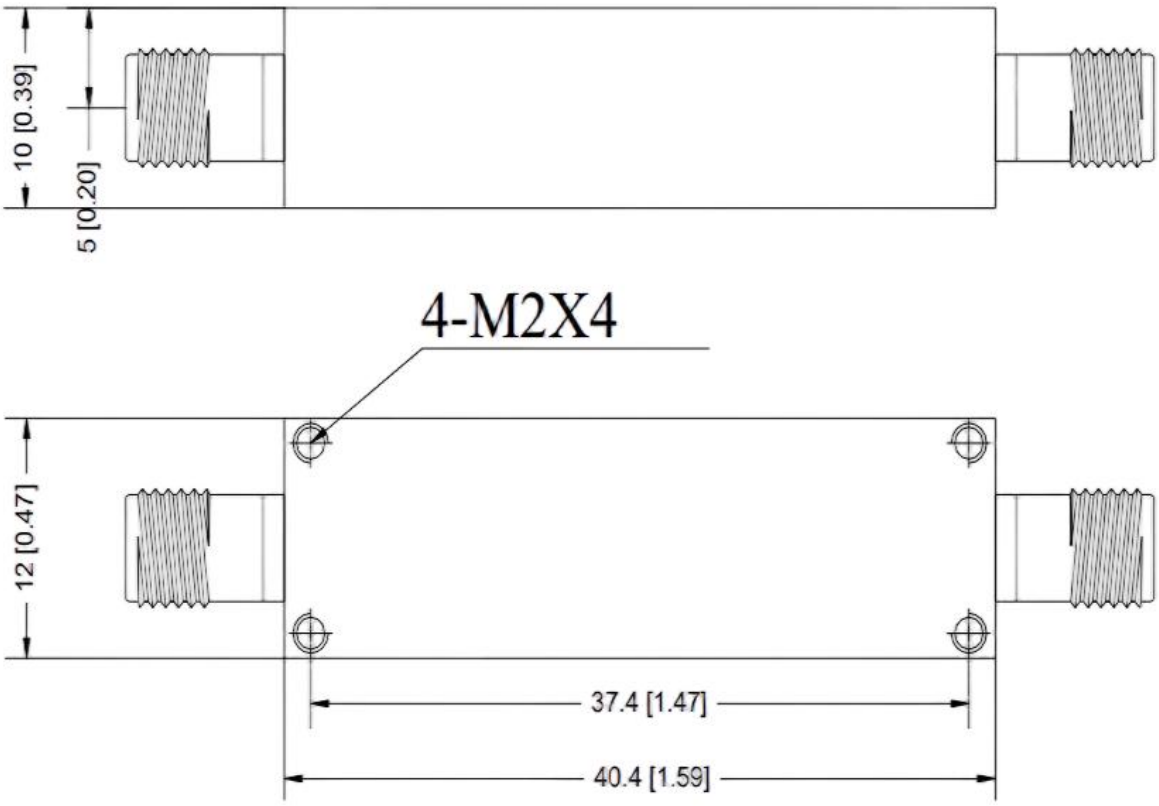


Ordering Information:

Base Number	Description	Revision
BPF-3M-1M-L	Coaxial Band-pass Filter,Passband center frequency: 3MHz,Insertion Loss(f0):6.0dB, SMA Female	Rev.1.0

BPF-3M-1M-L
Band Pass Filter
Center Frequency 3 MHz/SMA Female

Typical Performance Data:

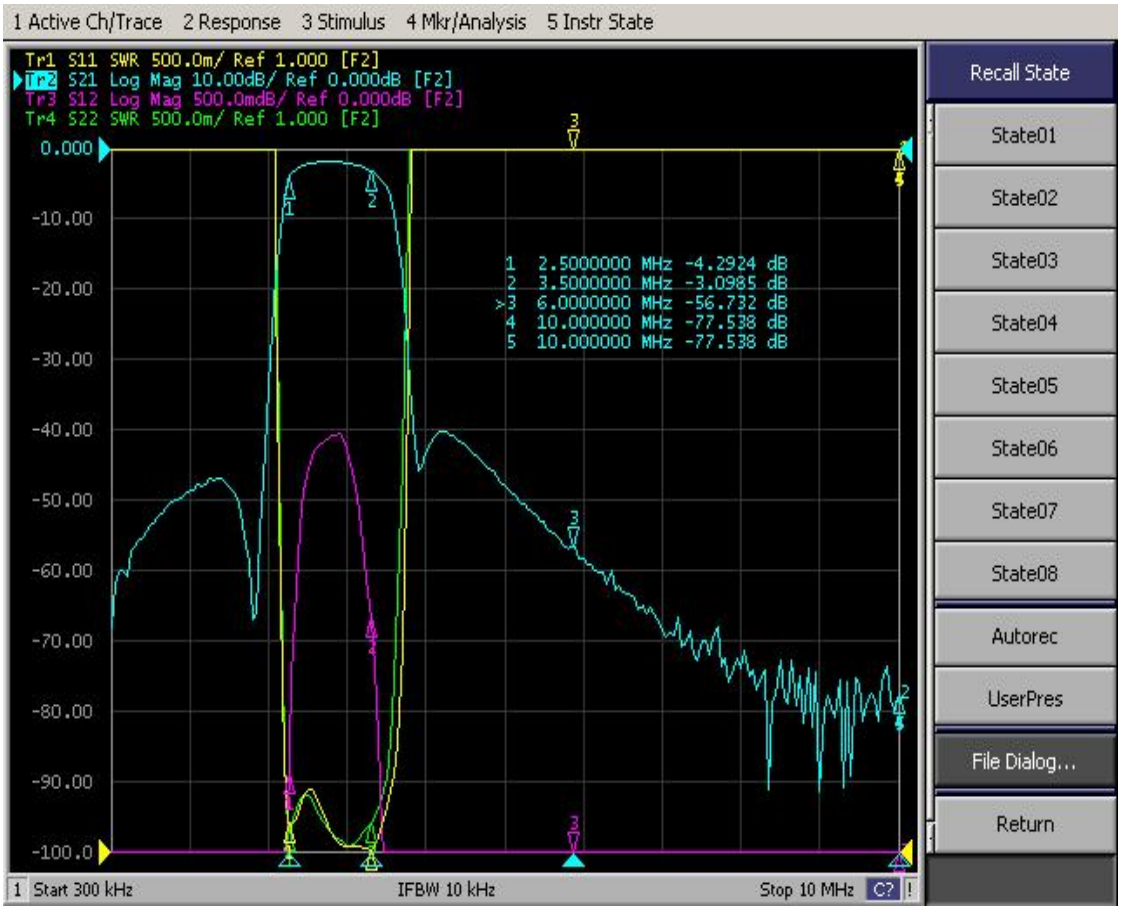

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.