

1P6T Coaxial Switch
LF-1P6T-XX18-DT
DC-18GHz, DSUB-15, Terminated



Electrical Characteristics:

Parameter	Condition		
Frequency range	DC-18 GHz		
Impedance	50 Ω		
Operation mode	Normally Open		
Switch sequence	Break before make		
Switching time	15 ms max		
Mechanical life	1 million min		
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)		
Termination power CW	0.5W		
Rated voltage	12	24	28 VDC
Operating current at 23 °C	300	167	160 mA



RF Specifications:

REQUENCY RANGE(GHz)	DC-6	6-12	12-18
INSERTION LOSS (MAX) dB	0.3	0.4	0.5
ISOLATION (MIN) dB	80	70	60
V.S.W.R. (MAX)	1.3:1	1.4:1	1.5:1


Envrionmental And Physical Characteristics:

Parameter	Condition
Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
Sine vibration(Operating)	20-2000Hz , 10G RMS
Shocks(Non Operating)	50g / 11msec, ½ sine
RF Connector type	SMA Female
Control connector	D-SUB 15Pin male
Weight	240g Max
Housing Color	Black


1P6T Coaxial Switch
LF-1P6T-XX18-DT
DC-18GHz, DSUB-15, Terminated




Outline Drawing: Unit: mm

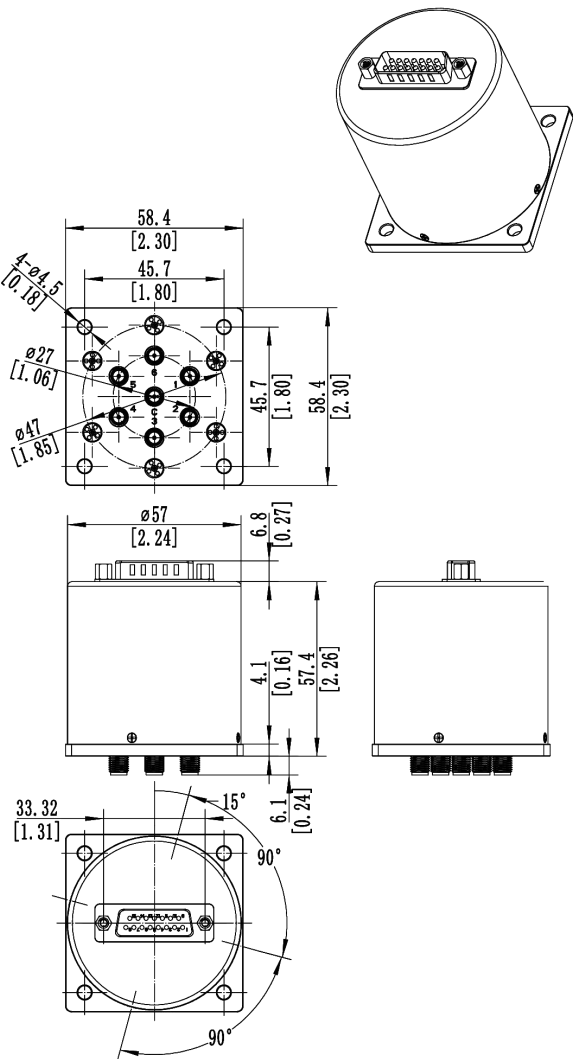

Schematic:

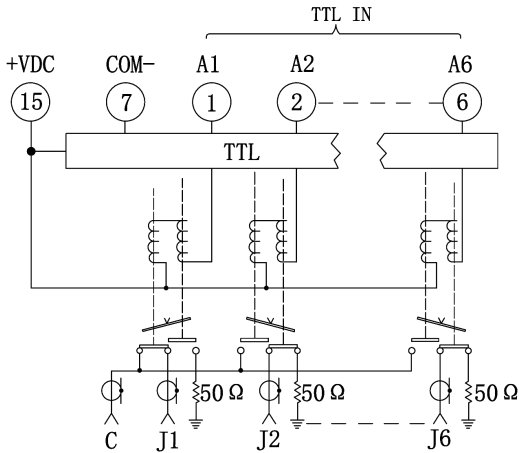

Average power:

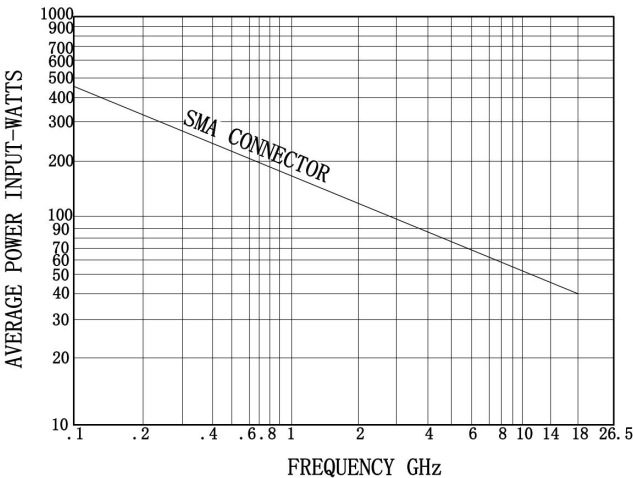


This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

1P6T Coaxial Switch
LF-1P6T-XX18-DT
DC-18GHz, DSUB-15, Terminated



Pin Definition:

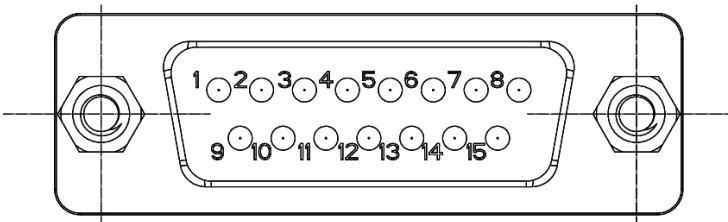

15 PIN D-SUB		RF Connect Used
Pin NO.	Function	SP6T
1	A1 (TTL IN)	1
2	A2 (TTL IN)	2
3	A3 (TTL IN)	3
4	A4 (TTL IN)	4
5	A5 (TTL IN)	5
6	A6 (TTL IN)	6
7	COM-	
15	+VDC	
8-14	UNUSED	

Part Number:

Part Number	Rated Voltage	Option
1P6T		
LF-1P6T-1218-DT	12VDC	
LF-1P6T-2418-DT	24VDC	
LF-1P6T-2818-DT	28VDC	

1P6T Coaxial Switch
LF-1P6T-XX18-DT
DC-18GHz, DSUB-15, Terminated



Typical Performance Data:

