BPF-260M-70M-L
Band Pass Filter
225-295 MHz/SMA Female

BPF-260M-70M-L is a coaxial band-pass filter with a passband frequency from 225 to 295 MHz and a rejection frequencies at fc±60 MHz. The maximum insertion loss of the filter is 2.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 225 to 295 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		225		295	MHz
Band Width				70	MHz
Insertion Loss(f0)				2.0	dB
Pass Band Ripple				1.8	dB
VSWR				1.6	:1
Rejection	@fc±60MHz	40			dB
	@ > 301MHz	5			dB
Power Handling				2	W
Impedance		50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-260M-70M-L
Band Pass Filter
225-295 MHz/SMA Female

Outline Drawing:

Unit:mm

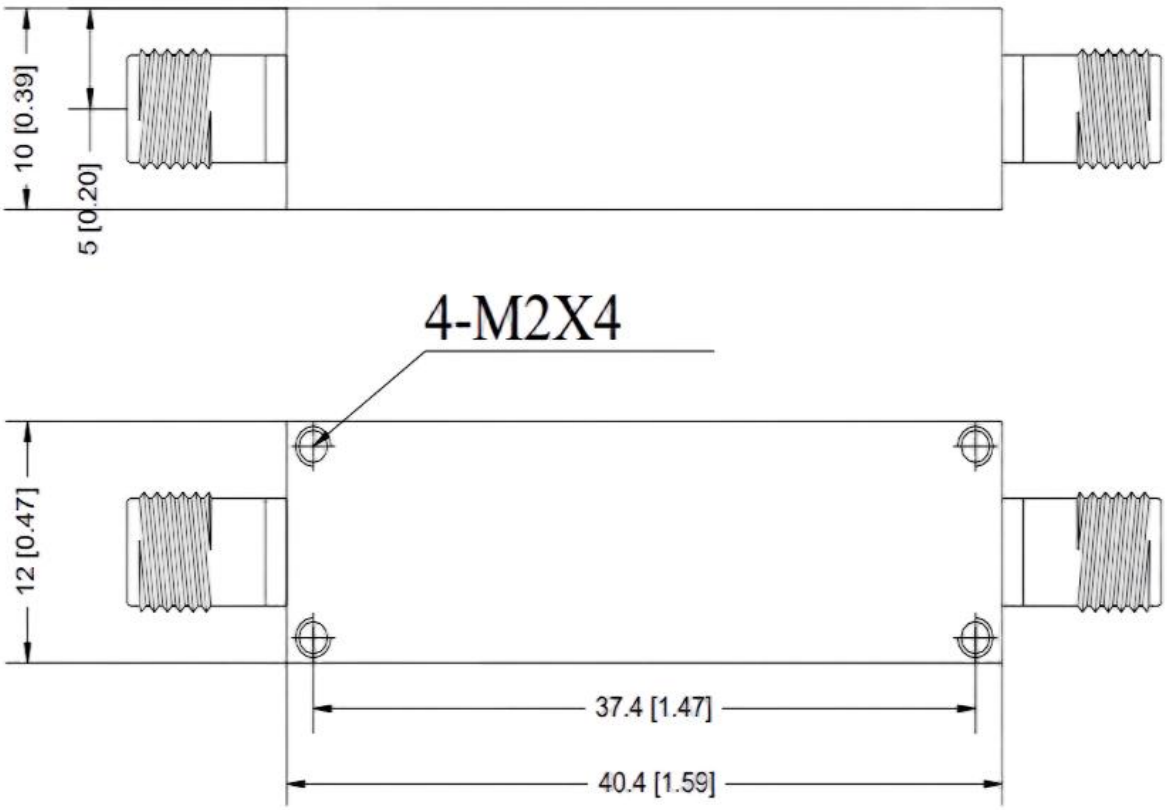


Ordering Information:

Base Number	Description	Revision
BPF-260M-70M-L	Coaxial Band-pass Filter,Passband frequency range:225-295MHz,Insertion Loss(f0):2.0dB, SMA Female	Rev.1.0

BPF-260M-70M-L
Band Pass Filter
225-295 MHz/SMA Female

Typical Performance Data:

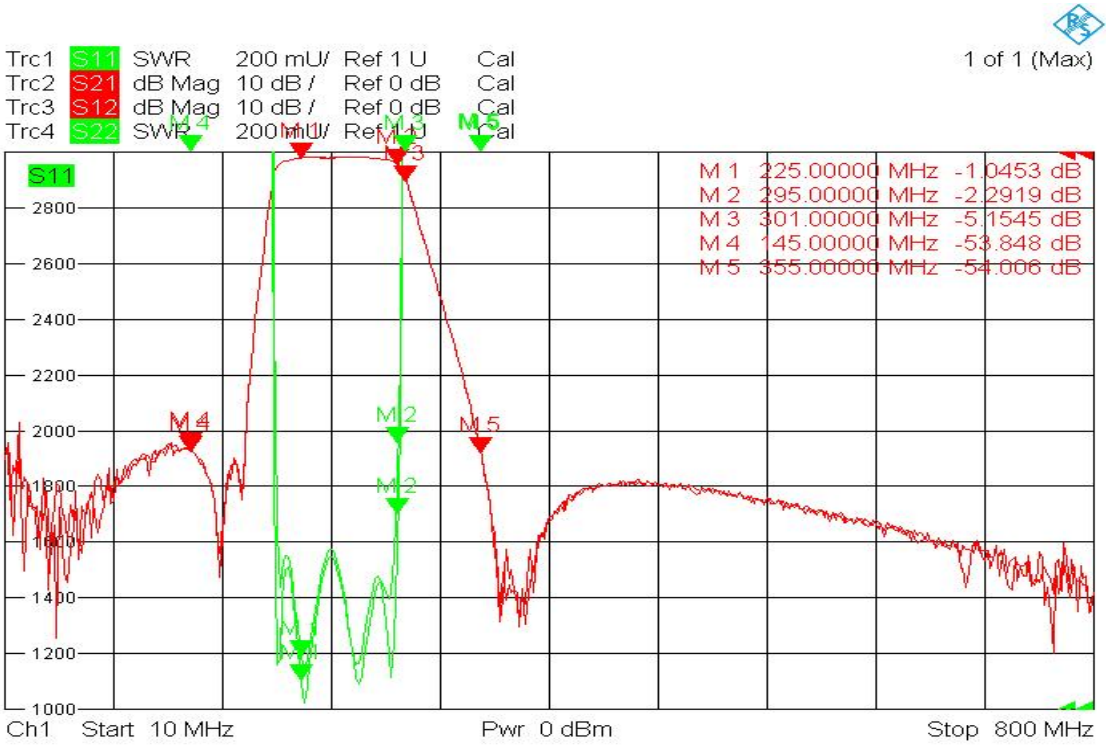

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.