

LT-LF-DC-19G-2.92XX is a coaxial lowpass filter with a passband frequency from DC to 19 GHz . The nominal insertion loss of the filter is 1.7 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range DC to 19 GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	DC	19		GHz
Passband Insertion Loss			1.7	dB
Rejection	20@23.6GHz,40@27.8GHz			dB
Power Handling			1	W
Return Loss		17		dB
Impedance	50			Ohms

Envrionmental And Physical Characteristics:


Description	Parameter	Units
Operating Temerature	-55 To +125	°C
Storage Temerature	-65 to +150	°C
Connectors	2.92mm	

Coaxial Lowpass Filter
LT-LF-DC-19G-2.92XX
DC -19 GHz, 2.92 mm




Outline Drawing:


Unit:mm

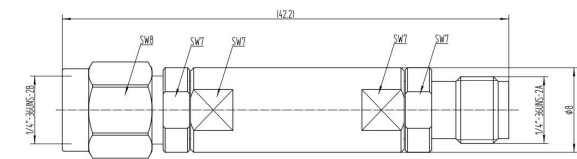

LT-LF-DC-19G-2.92MF

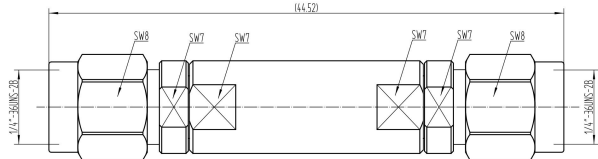

LT-LF-DC-19G-2.92MM

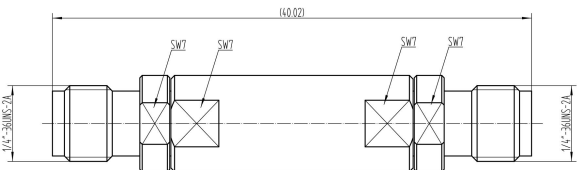

LT-LF-DC-19G-2.92FF

Ordering Information:

Base Number	Description	Revision
LT-LF-DC-19G-2.92MF	Coaxial Lowpass Filter,Passband frequency range:DC-19GHz,Passband Insertion Loss:1.7dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination	Rev.1.1
LT-LF-DC-19G-2.92MM	Coaxial Lowpass Filter,Passband frequency range:DC-19GHz,Passband Insertion Loss:1.7dB, 2.92mm Male Coaxial Fixed Termination	Rev.1.1
LT-LF-DC-19G-2.92FF	Coaxial Lowpass Filter,Passband frequency range:DC-19GHz,Passband Insertion Loss:1.7dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1