BPF-100M-400M-L
Band Pass Filter
100-400 MHz/SMA Female

BPF-100M-400M-L is a coaxial band-pass filter with a passband frequency from 100 to 400 MHz and a rejection frequencies from DC to 50 MHz and point at 500 MHz. The maximum insertion loss of the filter is 1.2 dB and the minimum rejection is 60 dB.

Features:

- Passband Frequency Range 100 to 400 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	100		400	MHz
Band Width			300	MHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple			1.0	dB
VSWR			1.6	:1
Rejection@DC-50MHz&500MHz	60			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-100M-400M-L
Band Pass Filter
100-400 MHz/SMA Female

Outline Drawing:

Unit:mm

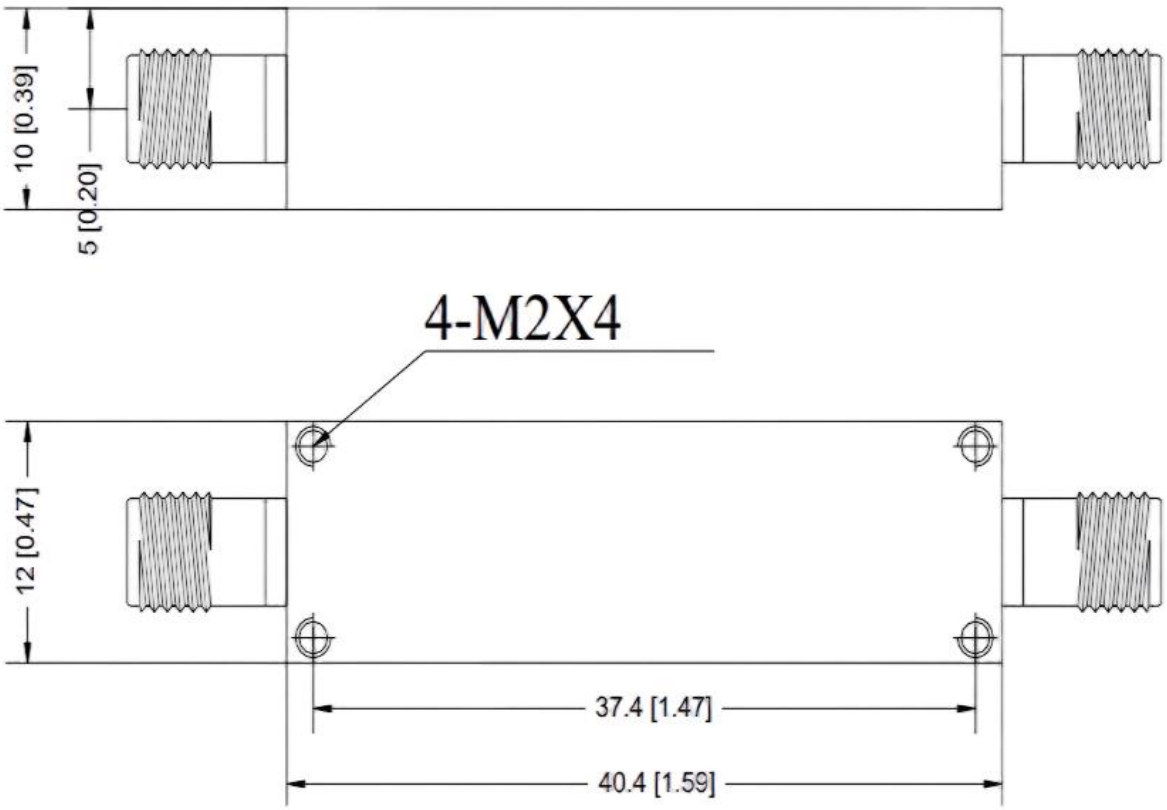


Ordering Information:

Base Number	Description	Revision
BPF-100M-400M-L	Coaxial Band-pass Filter,Passband frequency range:100-400MHz,Passband Insertion Loss:1.2dB, SMA Female	Rev.1.0

BPF-100M-400M-L
Band Pass Filter
100-400 MHz/SMA Female

Typical Performance Data:

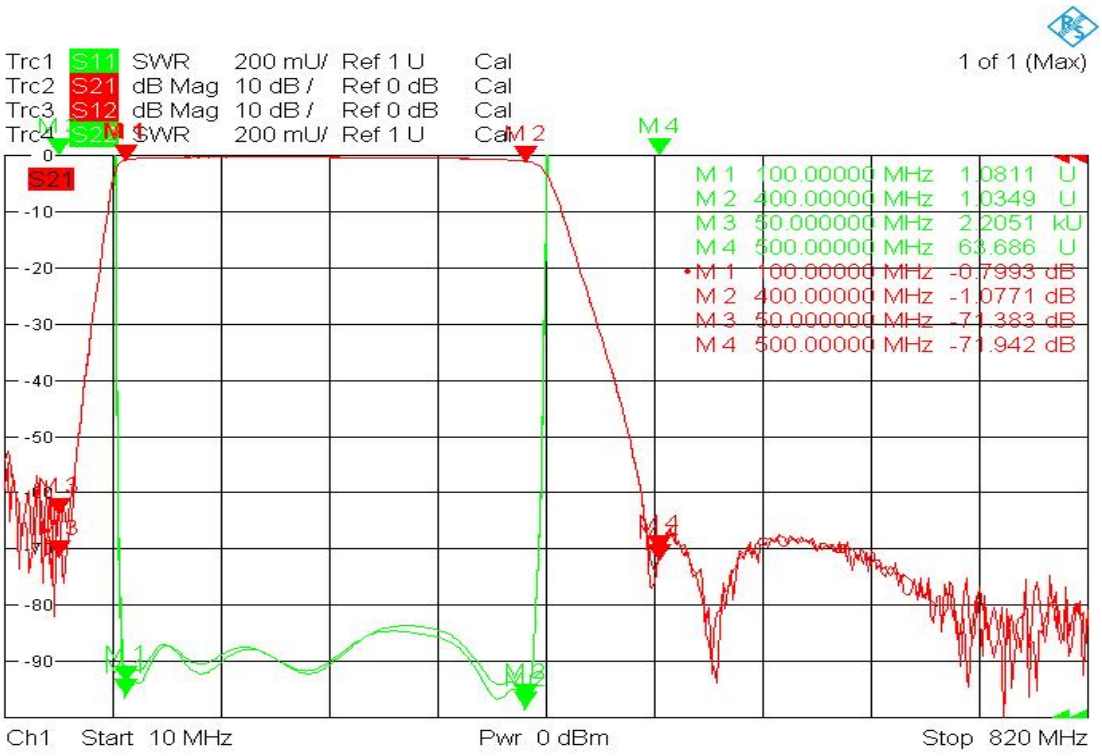

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.