BPF-140M-20M-L
Band Pass Filter
130-150MHz/SMA Female

BPF-140M-20M-L is a coaxial band-pass filter with a passband frequency from 130 to 150 MHz and a rejection frequencies at fc±50 MHz. The maximum insertion loss of the filter is 2.8 dB and the minimum rejection is 60 dB.

Features:

- Passband Frequency Range 130 to 150 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	130		150	MHz
Band Width			20	MHz
Insertion Loss(f0)			2.8	dB
Pass Band Ripple			2.6	dB
VSWR			1.6	:1
Rejection@fc±50MHz	60			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-140M-20M-L
Band Pass Filter
130-150MHz/SMA Female

Outline Drawing:

Unit:mm

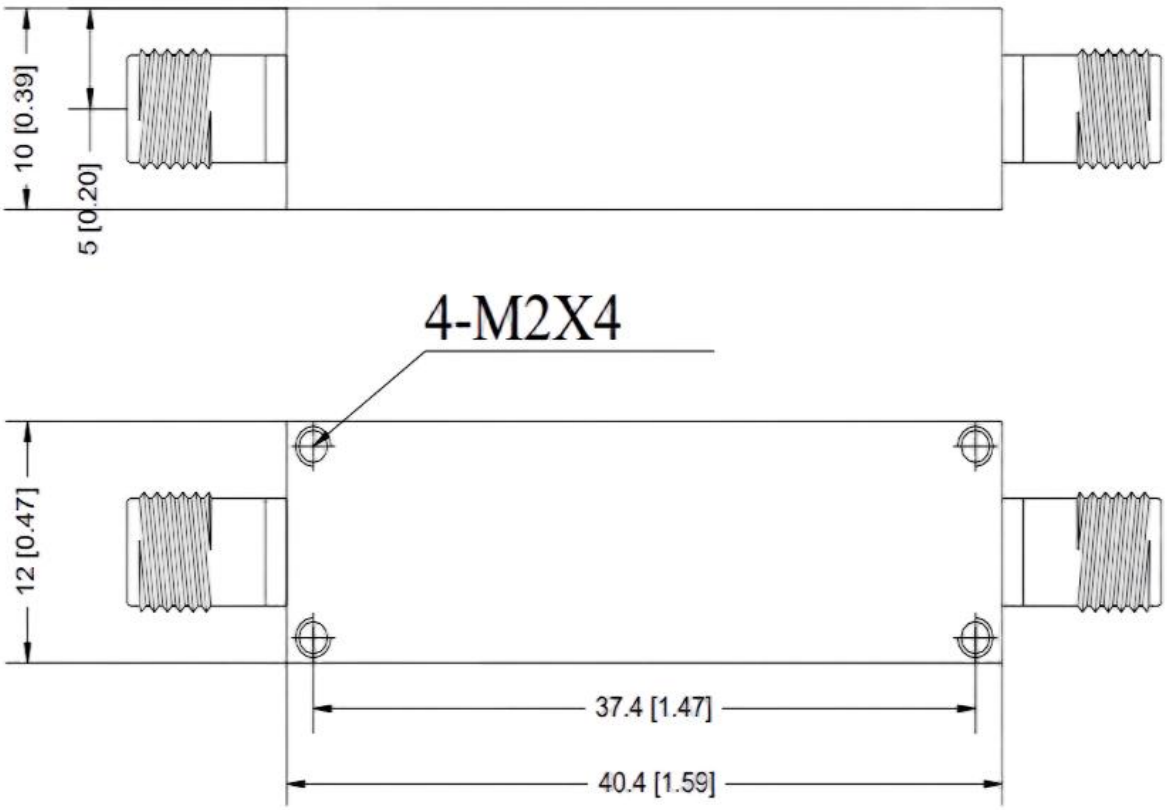


Ordering Information:

Base Number	Description	Revision
BPF-140M-20M-L	Coaxial Band-pass Filter,Passband frequency range:130-150MHz,Insertion Loss(f0):2.8dB, SMA Female	Rev.1.0

BPF-140M-20M-L
Band Pass Filter
130-150MHz/SMA Female

Typical Performance Data:

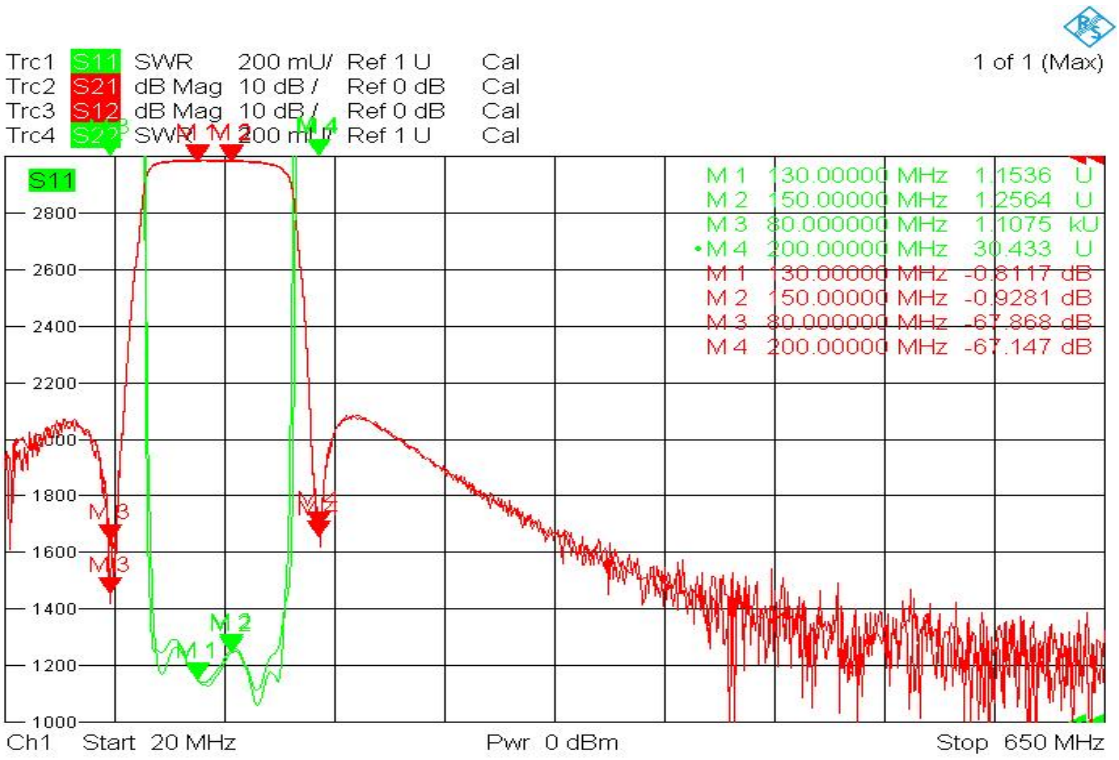

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.