BPF-300M-200M-L2
Band Pass Filter
200-400 MHz/SMA Female

BPF-300M-200M-L2 is a coaxial band-pass filter with a passband frequency from 200 to 400 MHz and a rejection frequencies from DC to 150 MHz and from 480 to 800 MHz. The maximum insertion loss of the filter is 1.5 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 200 to 400 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	200		400	MHz
Band Width			200	MHz
Insertion Loss(f0)			1.5	dB
Pass Band Ripple			1.2	dB
VSWR			1.6	:1
Rejection@DC-150MHz& 480-800M	40			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-300M-200M-L2
Band Pass Filter
200-400 MHz/SMA Female

Outline Drawing:

Unit:mm

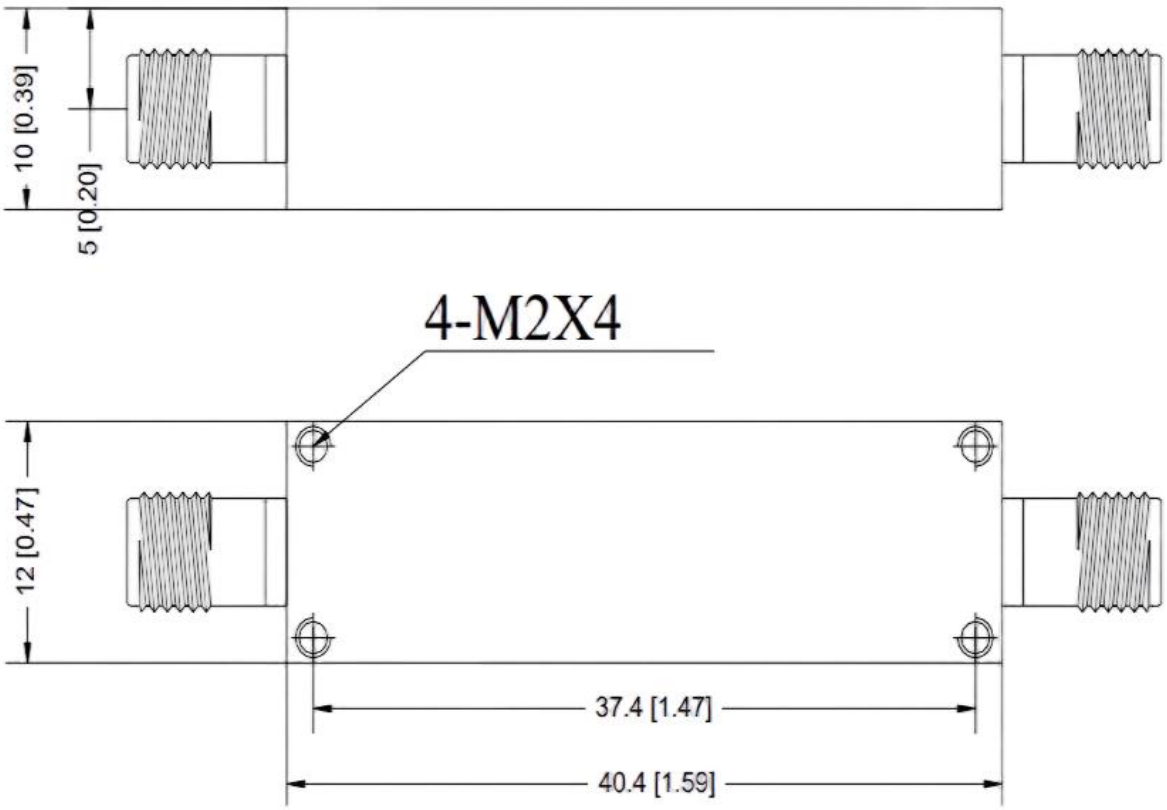


Ordering Information:

Base Number	Description	Revision
BPF-300M-200M-L2	Coaxial Band-pass Filter,Passband frequency range:200-400MHz,Insertion Loss(f0):1.5dB, SMA Female	Rev.1.0

BPF-300M-200M-L2
Band Pass Filter
200-400 MHz/SMA Female

Typical Performance Data:

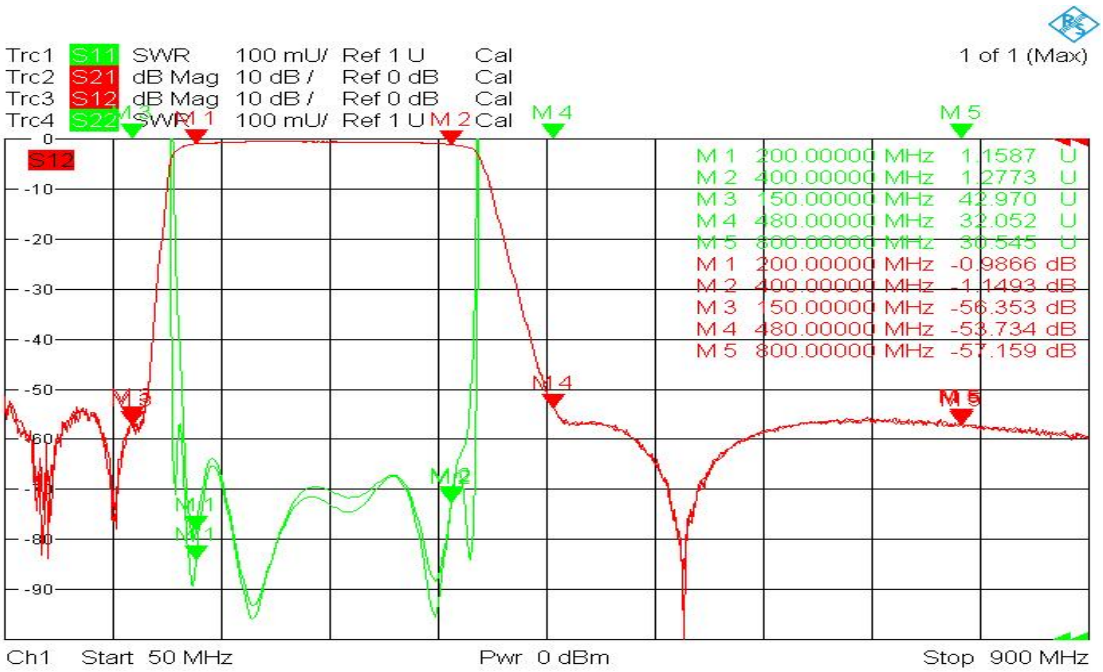

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.