

L8 Low Loss Cable Assemblies


LAUFTEK

**Product
Specification**

Product Code

LT-8-NMUHFM-20M

Sketch Map:

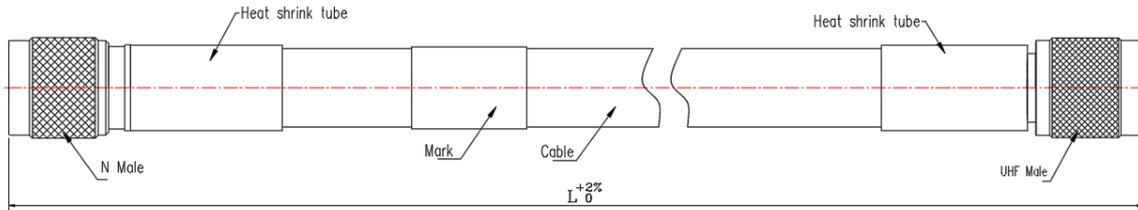

Electrical & Mechanical Characteristics

Impedance	50 Ohm
Insulation Resistance	5000(MΩ)
Operating Frequency	DC-1 GHz
Dielectric Withstanding Voltage	2500V
VSWR	≤1.3:1
Insertion Loss	≤2dB
Velocity Of Propagation	85%
Min. Bending Radius Static	75mm
Operating Temperature	-20~+80°C
Cable Diameter	15mm

Material&Coat-Plating

Cable Jacket	PVC
Connector Body	Brass, Nickel Plating
Connector Inner Conductor	Brass, Gold Plating
Connector Nut	Brass, Nickel Plating
Connector Insulators	PTFE

sales@lauftek.ru | lauftek.ru | +7 495 275 13 46