BPF-80M-1M-L
Band Pass Filter
Center Frequency 80 MHz/SMA Female

BPF-80M-1M-L is a coaxial band-pass filter with a passband center frequency at 80 MHz and a rejection frequencies from DC to 40MHz and point at 120 MHz. The maximum insertion loss of the filter is 4.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Center Frequency 80 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	78		82	MHz
Band Width		1	4	MHz
Passband Insertion Loss(f0)			4.0	dB
Pass Band Ripple			3.8	dB
VSWR			1.6	:1
Rejection@DC-40MHz&120MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

BPF-80M-1M-L
Band Pass Filter
Center Frequency 80 MHz/SMA Female

Outline Drawing:

Unit:mm

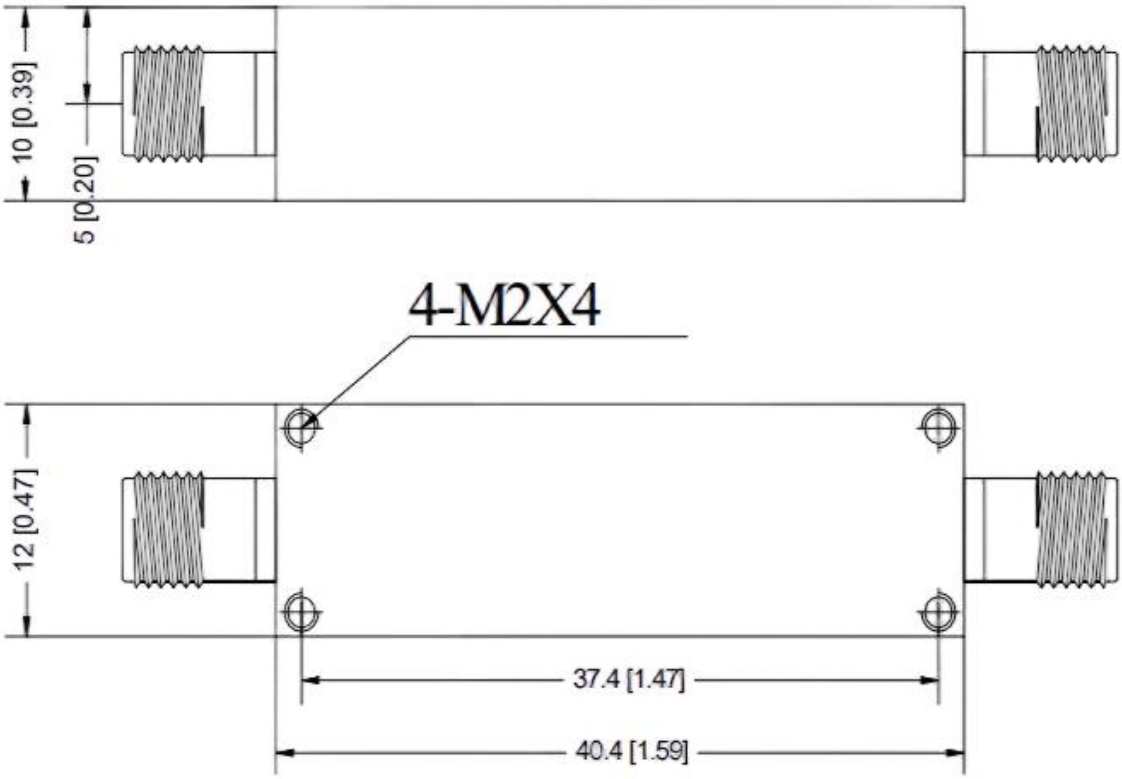


Ordering Information:

Base Number	Description	Revision
BPF-80M-1M-L	Coaxial Band-pass Filter,Passband center frequency: 80MHz,Passband Insertion Loss:4.0dB, SMA Female	Rev.1.0

BPF-80M-1M-L
Band Pass Filter
Center Frequency 80 MHz/SMA Female

Typical Performance Data:

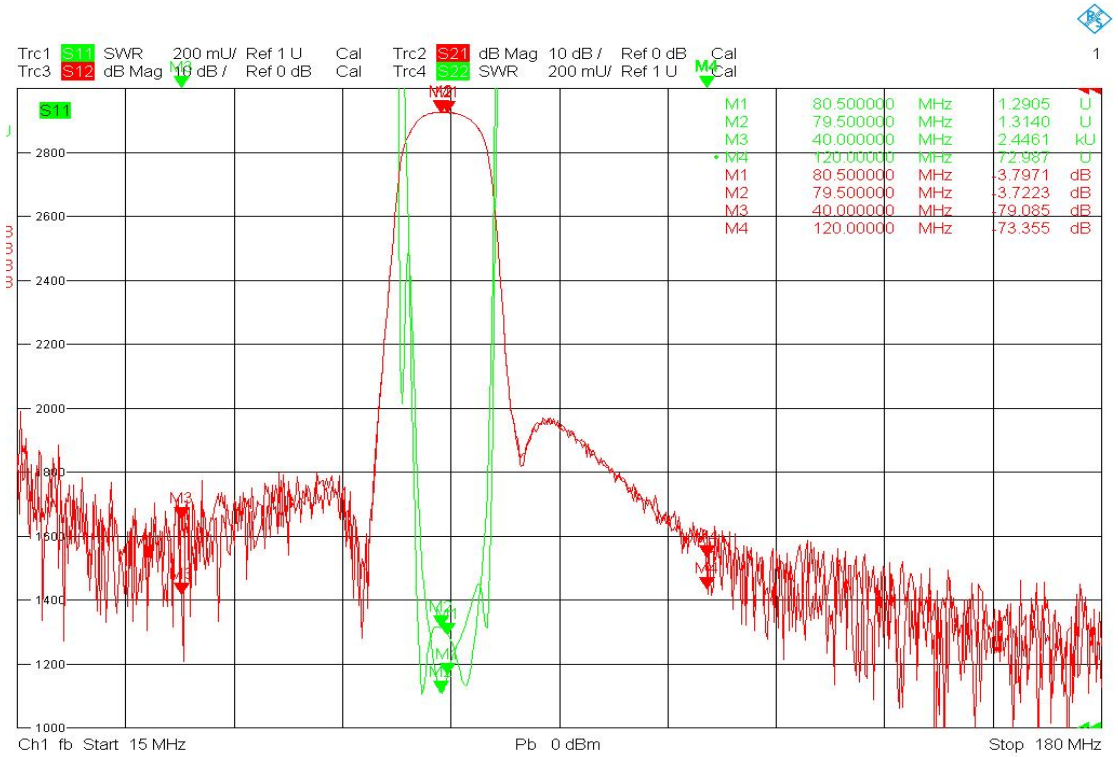

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.