


Model: LF-A-XX-A20-2.92-40

LAUFTEX

2.92mm Attenuators • Male to Female
• DC – 40 GHz - 20 W

lauftex.ru | sales@lauftex.ru



@LAUFTEX

ELECTRICAL

- **Frequency Range** DC – 40 GHz
- **Attenuation (dB)**
 - 3-10 -1.5/+1.5 dB
 - 20 -1.5/+1.5 dB
 - 30 -1.5/+1.5 dB
 - 40 -1.5/+2.0 dB
- **VSWR (MAX)** DC – 40GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 20 Watts Average at 25°C; 2 Watts at 125°C
PEAK: 200 Watts
(5 µSec Pulse Width , 10% Duty Cycle)

MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Passivated Stainless Steel
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PEI


ORDER

Model Number: LF-A-XX-A20- 2.92-40


Unit: mm

└─── dB Value


3-30db Outline dimensions

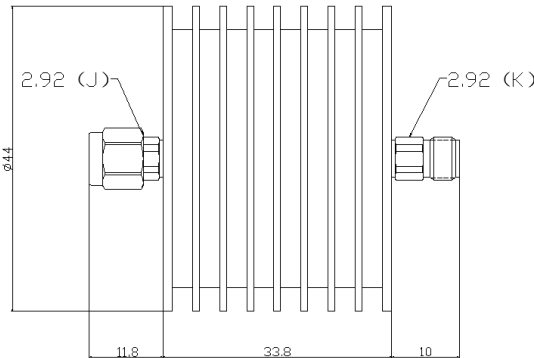


40db Outline dimensions

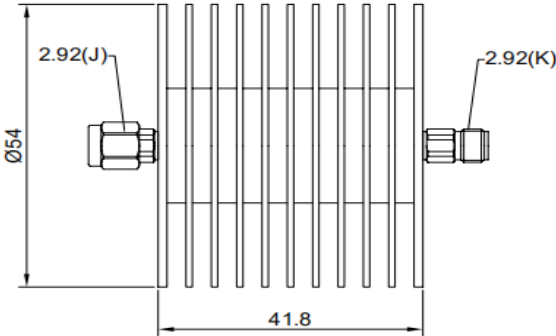

LF-A-03-A20-2.92-40

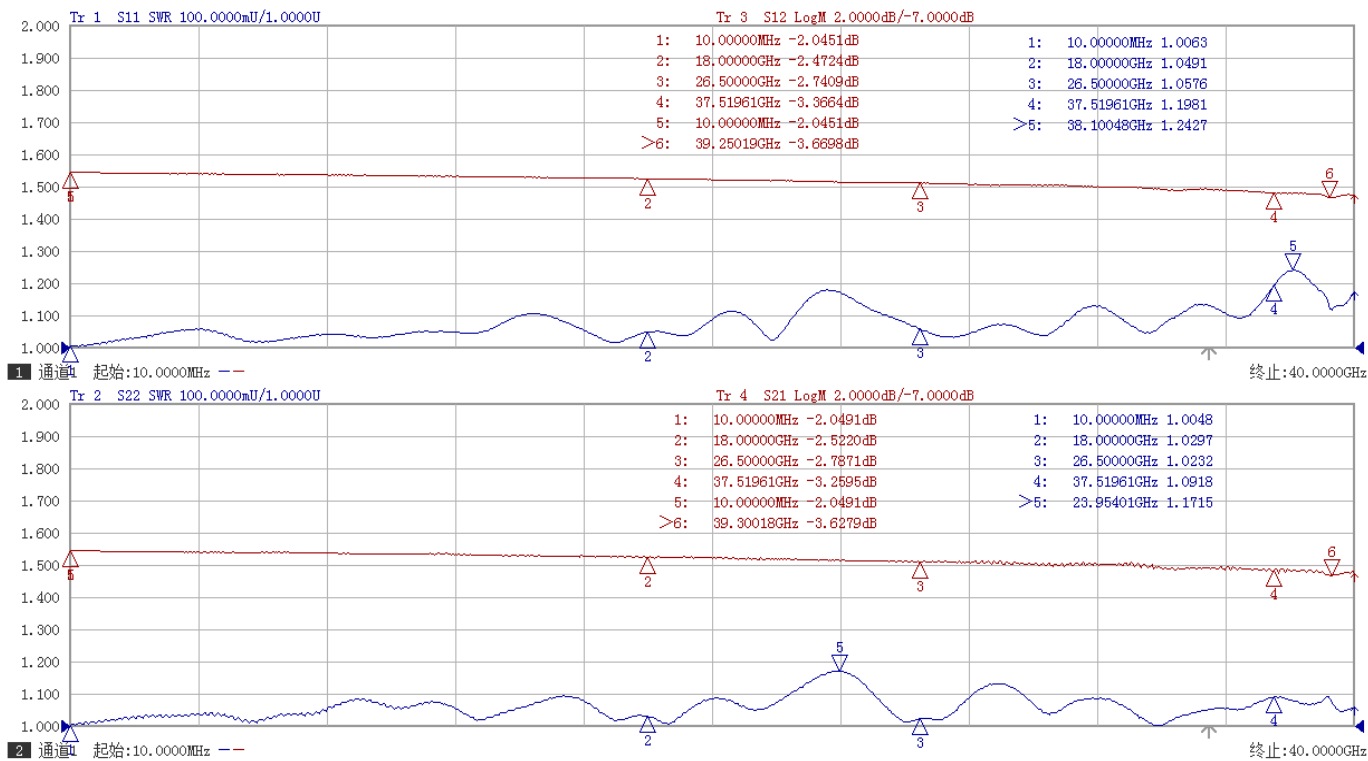

LF-A-06-A20-2.92-40

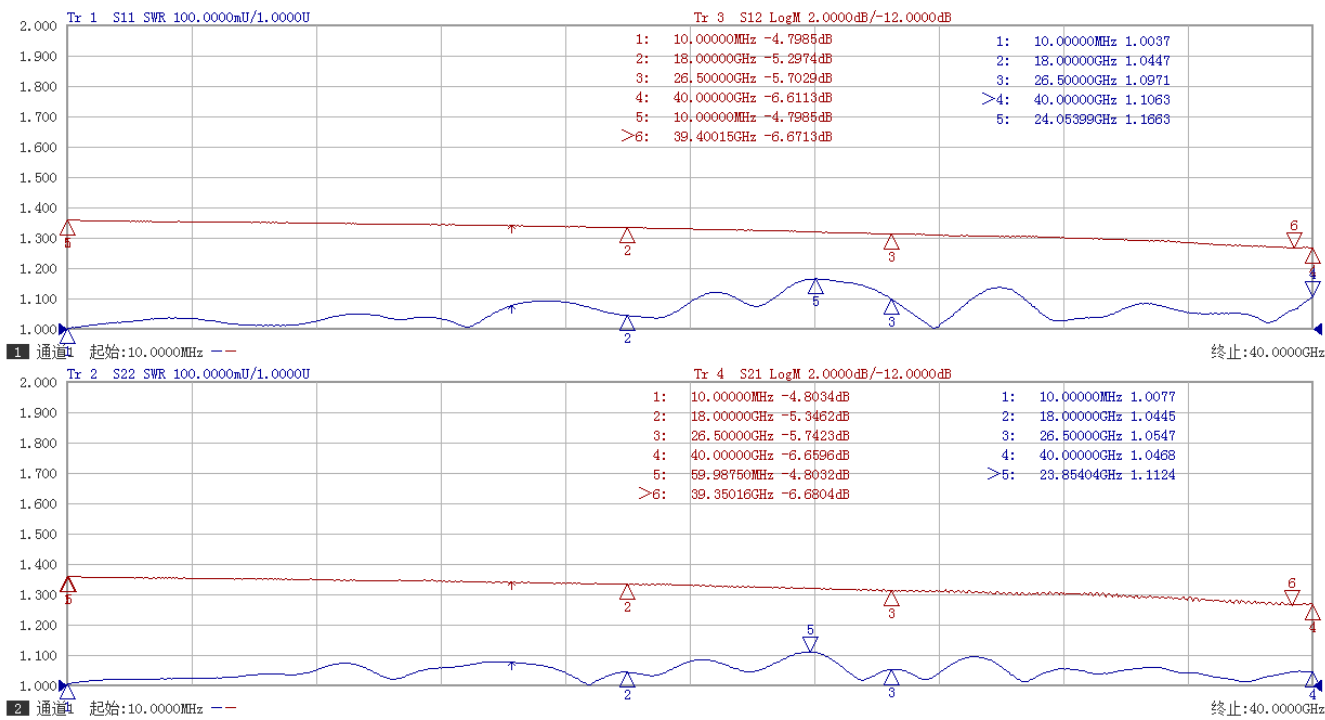

LF-A-20-A20-2.92-40

