

LF-A100-XX-SMA-27G
SMA Attenuators • Male to Female
DC – 27 GHz - 100 W
sales@lauftex.ru | lauftex.ru


LAUFTEX

ELECTRICAL

- **Frequency Range** DC – 27 GHz
- **Attenuation (dB)**
 - 10 -2.0/+2.8 dB
 - 20 -1.5/+2.2 dB
 - 30 -1.2/+1.5 dB
 - 40 -1.2/+1.5 dB
- **VSWR (MAX)** DC – 27GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 100 Watts Average at 25°C
 PEAK: 500 Watts
 (5 µSec Pulse Width , 10% Duty Cycle)

MECHANICAL

- **Connectors** Passivated Stainless Steel or
Brass , Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated

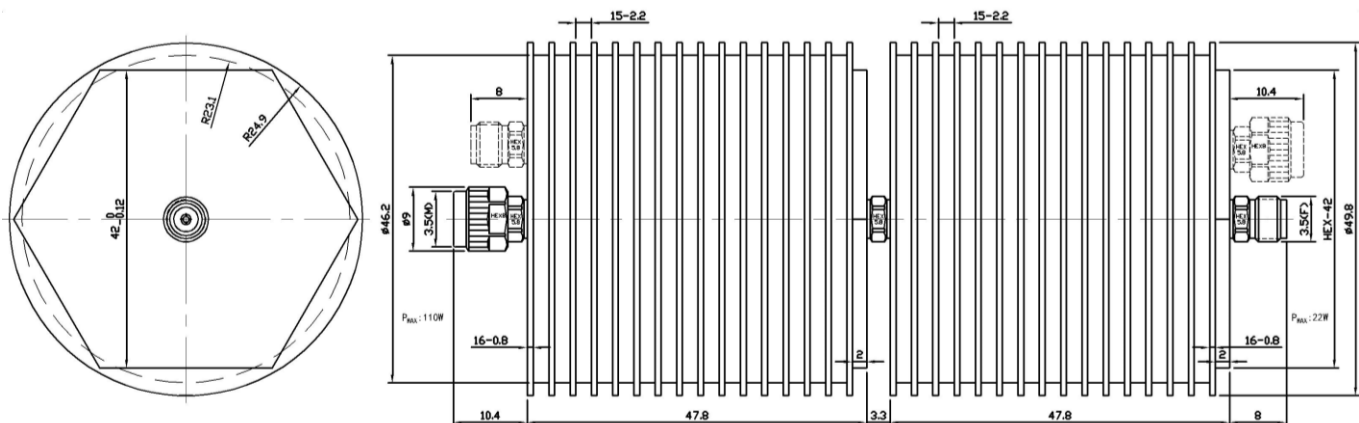

- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

Unit: mm

ORDER

LF-A100-XX-SMA-27

dB Value