

LF-A30-XX-SMA-26.5G
SMA Attenuators • Male to Female
DC – 26.5 GHz - 30 W
sales@lauftex.ru | lauftex.ru

LAUFTEX

ELECTRICAL


- **Frequency Range** DC –26.5 GHz
- **Attenuation (dB)**
 - 10 -1.5/+2.0 dB
 - 20 -1.5/+2.0 dB
 - 30 -1.5/+2.0 dB
 - 40 -1.5/+2.0 dB
- **VSWR (MAX)** DC – 26.5GHz..... 1.30: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 30 Watts Average at 25°C
PEAK: 200 Watts
(5 µSec Pulse Width , 10% Duty Cycle)

MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Passivated Stainless Steel or
Brass,Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum PTFE
- **Insulators**

ORDER

Model Number: LF-A30-XX-SMA-26.5G
└──────────┘ dB Value

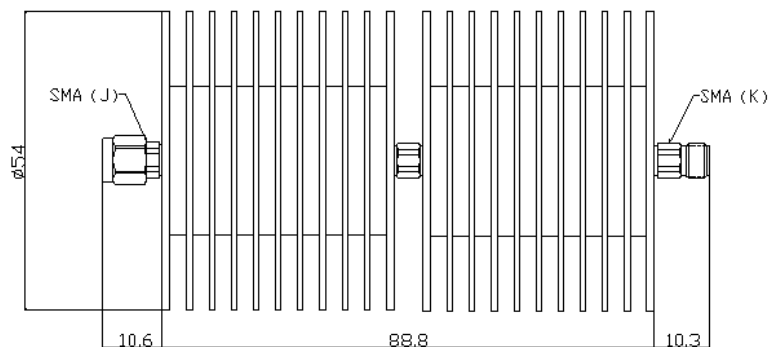

Unit: mm