


ELECTRICAL

- **Frequency Range** DC – 10GHz
- **Attenuation (dB)**
 - 30 ± 1.2 dB
 - 40 ± 1.2 dB
- **VSWR (MAX)** DC – 10GHz..... 1.50: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 200Watts Average at 25°C
PEAK: 5000Watts (5 μ Sec Pulse Width , 4% Duty Cycle)

MECHANICAL

- **Temperature Range** -55°C - +100°C
- **Body Material:** Black, Finned Aluminum
- **Center conductor:** Male: Gold-plated Brass;
Female: Gold-plated beryllium bronze;
- **Connectors:** Nickel plated Brass
- **Temperature Range:** -55°C - +125°C

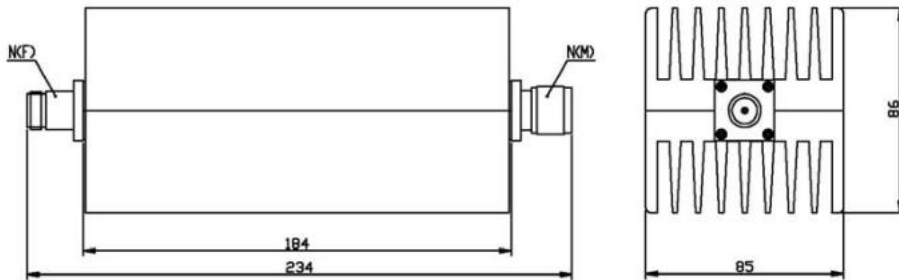

Unit:mm