

LF-A50-XX-SMA-4G

SMA Attenuators • Male to Female

DC – 4GHz - 50 W

sales@lauftex.ru | lauftex.ru


LAUFTEX

ELECTRICAL

- **Frequency Range** DC – 4GHz
- **Attenuation (dB)**
 - 3,6,10 -0.4/+0.4dB
 - 20,30..... -0.4/+0.4 dB
 - 40..... -0.5/+0.5 dB
 - 50..... -0.6/+0.6 dB
- **VSWR (MAX)** DC – 4GHz..... 1.2: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 50Watts Average at 25°C

MECHANICAL

- **Temperature Range** -55°C - +100°C
- **Body Material:** Black, Finned Aluminum
- **Center conductor:** Gold-plated, Phosphor bronze
- **Connectors:** Nickel plated Brass
- **Weight:** 245g

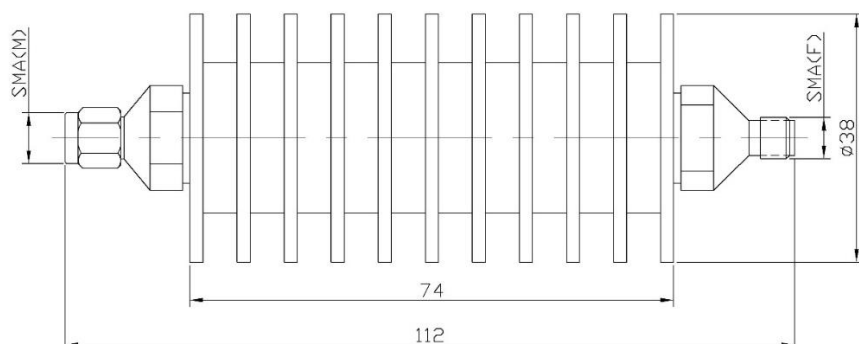

Unit:mm