


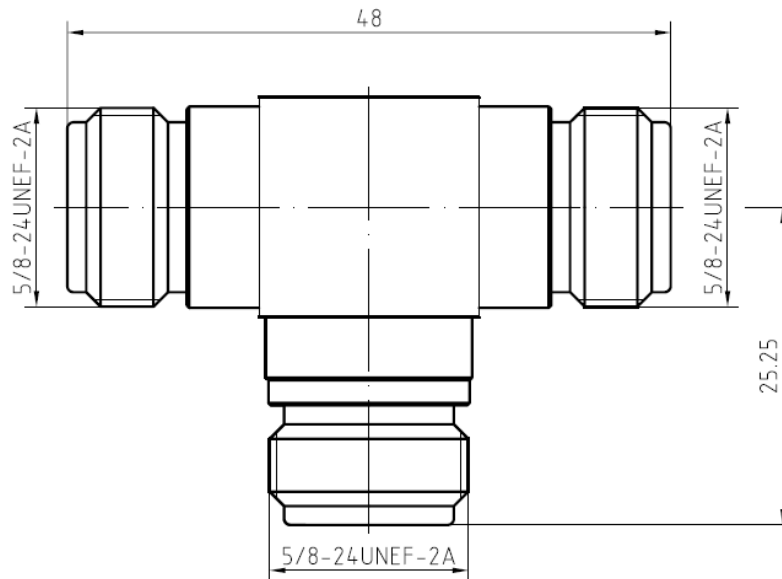

Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-3 GHz
Adapter Body Style	Tee
Operating Temperature	-45~ +125℃

Connector 1	N-Female
Connector 2	N-Female
Connector 3	N-Female

Material & Coat-Plating

Center Contact	Phosphor bronze/Gold Plated
Insulator	PTFE
Body	Brass/Nickel plated
Coupling Nut	N/A

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±
3 PLC ±
ANGLES ±1°

APVD

PRODUCT
SPEC

APPLICATO
N SPEC

Product Mode

LAUFTEK
LF-N-KKK-3G

SIZE
A4

GAGE CODE
0T8L4

DRAWING NO

CUSTOMER DRAWING

SCALE 4

SCALE 4: 1

SHEET1 OF 1

RVE 1