


MODEL: LFT-05265-20S

20dB Directional Coupler SMA -
Female 50Ω 0.5-26.5 GHz

sales@lauftex.ru | lauftex.ru

LAUFTEX



@LAUFTEX

Electrical:


Frequency Range: 0.5-26.5 GHz
Coupling:: 20 ± 1.5 db
Insertion Loss: 1.8db typ, 2.5db max
Directivity: : 12db typ, 10db min
VSWR: 1.7 max
Power Handling: 30 Watt
Impedance: 50 OHMS

Mechanical:

Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$
Connectors: SMA-Female
Relative Humidity: 0 ~ 90%





Outline Drawing:

Unit: mm

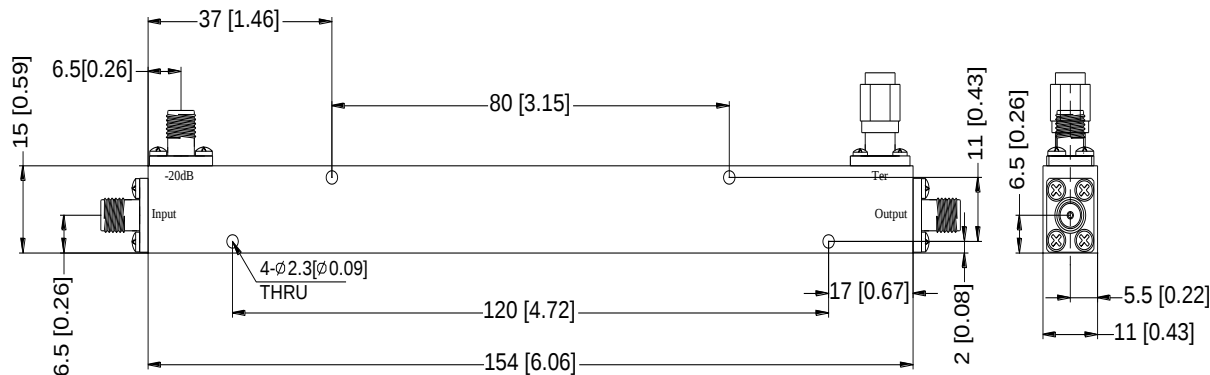


MODEL: LFT-05265-20S
20dB Directional Coupler SMA -Female
50Ω 0.5-26.5 GHz

LAUFT

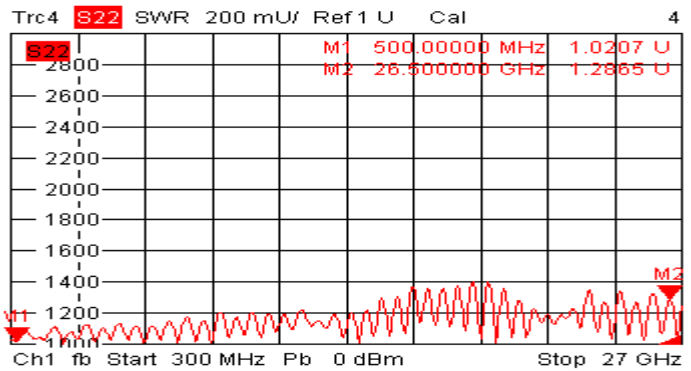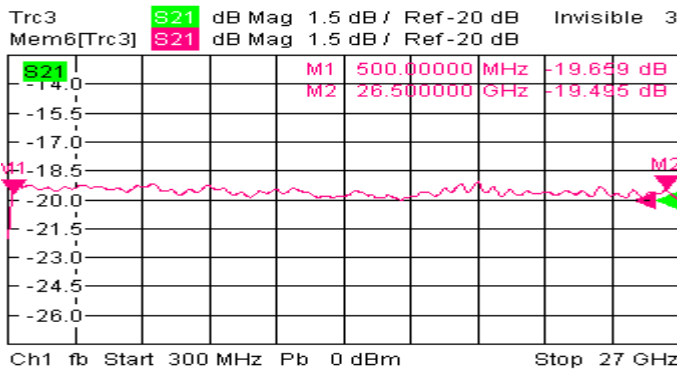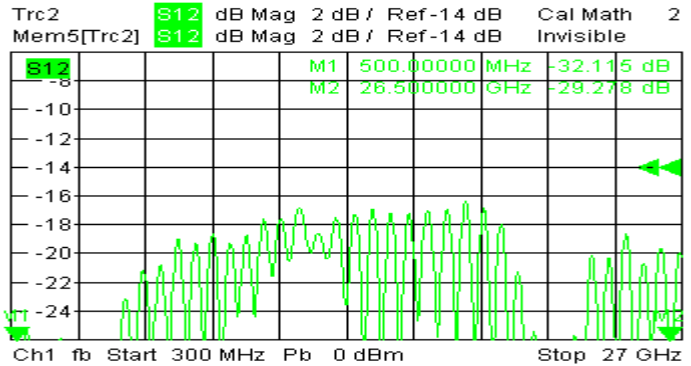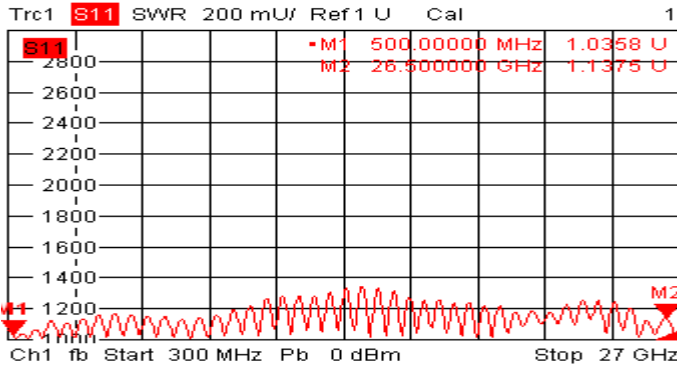

2/26/2020, 5:26 AM

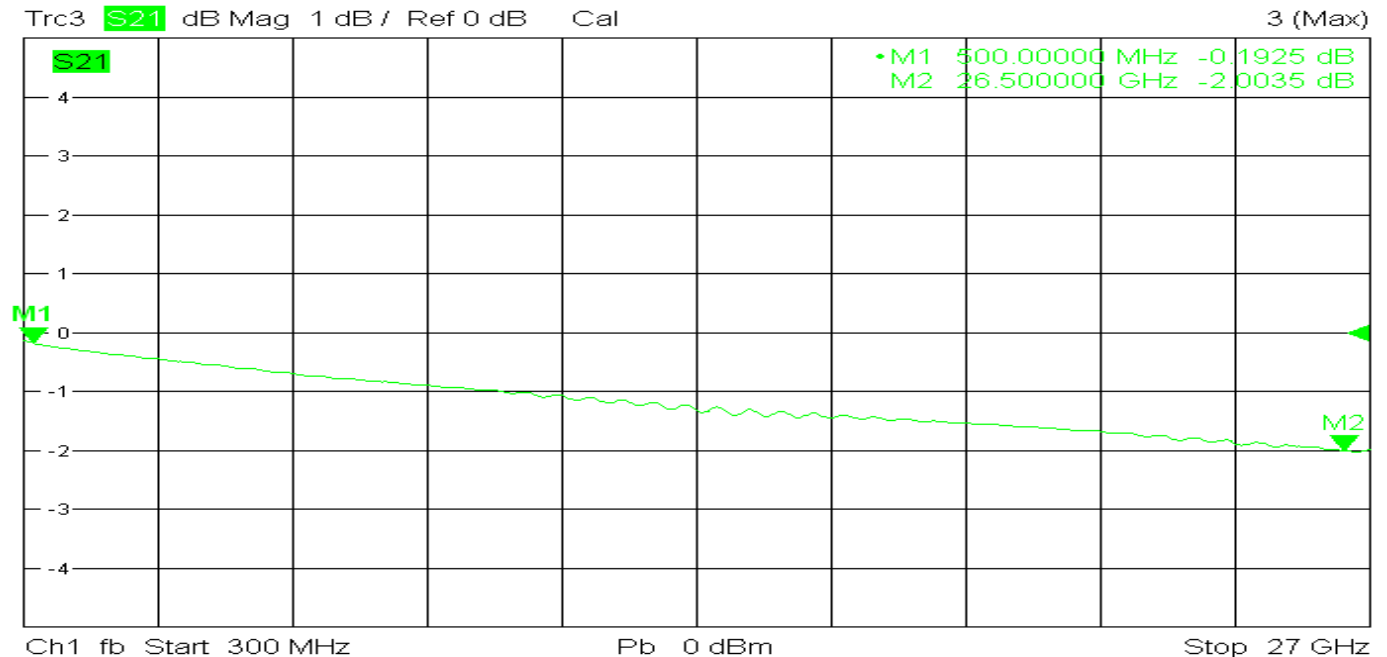

2/26/2020, 5:29 AM