

MODEL: LFT-16W0825-S



Power divider/Combiner 16 Way SMA 50Ω
0.8 to 2.5GHz

lauftex.ru | sales@lauftex.ru

Electrical:

Frequency Range: 0.8-2.5GHz

Insertion Loss: ≤1.7dB

VSWR: ≤1.50 : 1

Isolation: ≥20dB

Amplitude Balance: ≤±0.5dB

Phase Balance: ≤±8°

Power Handling: 30 Watt

Impedance: 50 OHMS

Mechanical :


Temperature Range: -55° C - +85° C

Connectors: SMA-Female

Relative Humidity: 0 ~ 90%


Outline Drawing:

Unit: mm

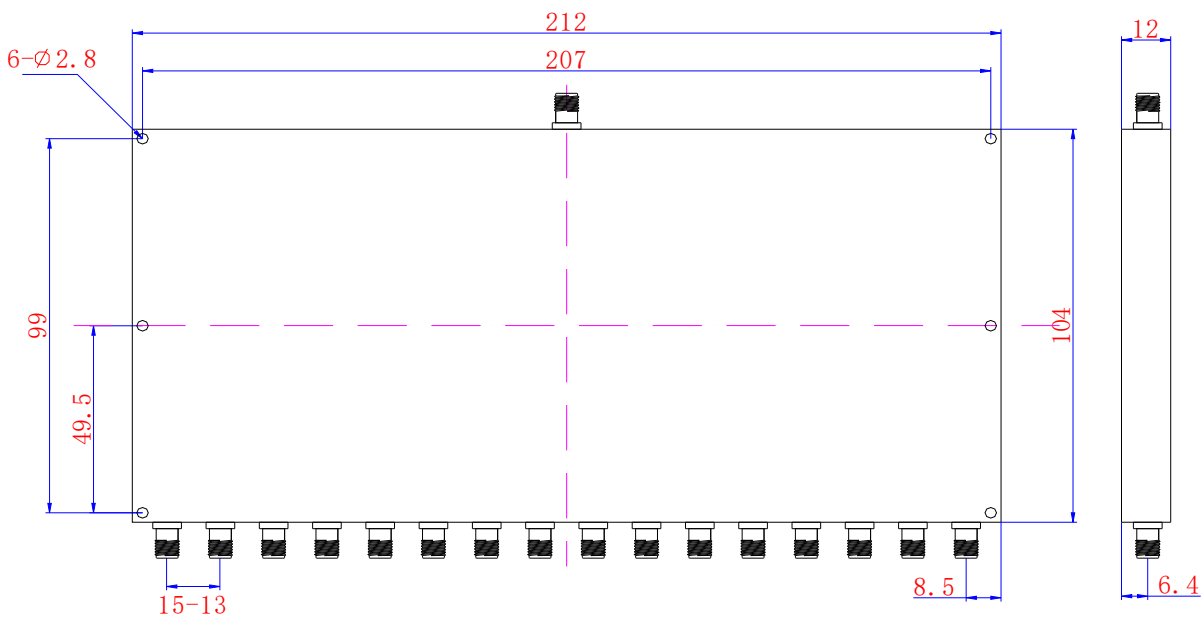


7 Sep 2017 10:13:10


CH1 SWR 100 m / REF 1
S11 3: 1.0252 1.024 770 093 GHz

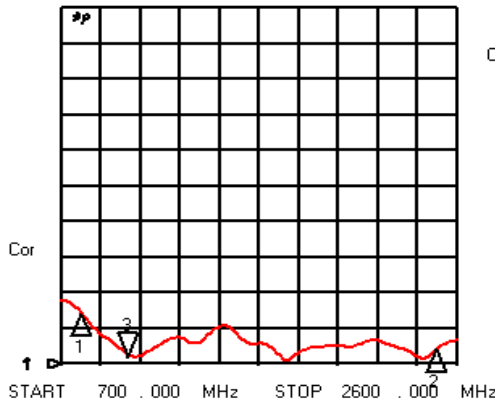

CH3 LOG 5 dB / REF -35 dB
S12 3: -23.481 dB 1.024 770 093 GHz

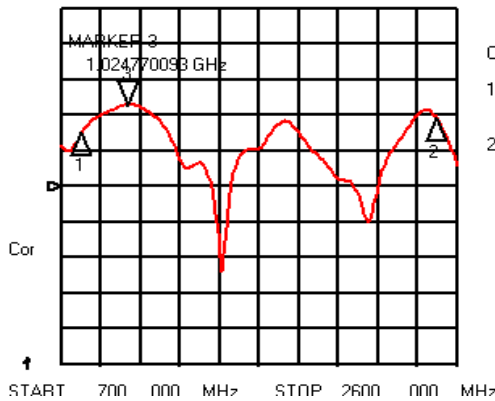

CH2 PHA 1 / REF 0
S21/M 3: -177.70 1.024 770 093 GHz

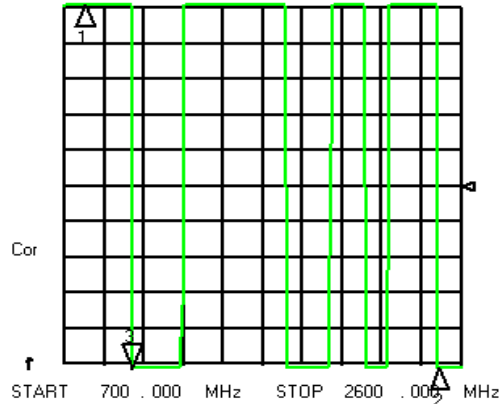

CH4 SWR 100 m / REF 1
S22 3: 1.0325 1.024 770 093 GHz

