

MODEL: LFT-4W0560-S



Power divider/Combiner4Way SMA50Ω
0.5 to 6GHz

lauftex.ru | sales@lauftex.ru

ELECTRICAL:


Frequency Range:	0.5-6GHz
Insertion Loss:	≤2dB
VSWR:	≤1.50: 1
Isolation:	≥16dB
Amplitude Balance:	≤±0.5dB
Phase Balance:	≤±4°
Power Handling:	30 Watt
Impedance:	50 OHMS

MECHANICAL :

Temperature Range:	-45° C - +85° C
Connectors:	SMA-Female
Relative Humidity:	0 ~ 90%


Outline Drawing:

Unit: mm

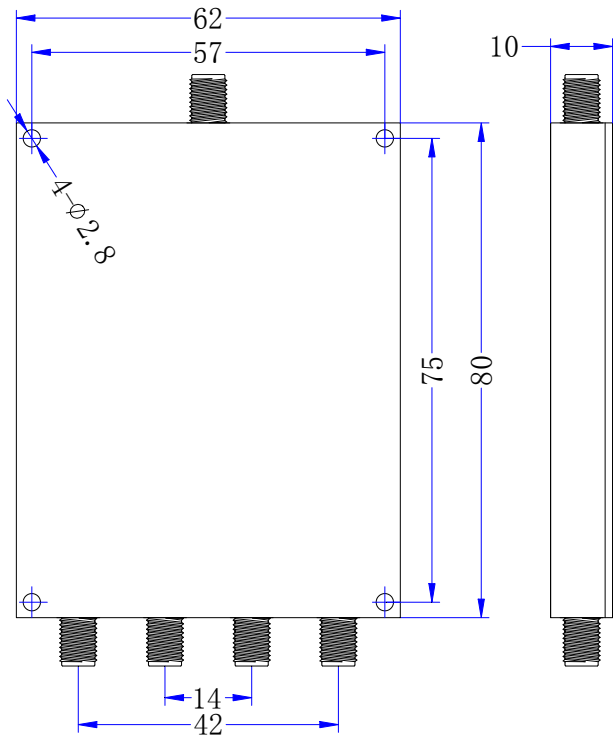


5 Mar 2018 07:23:37

CH1 SWR 100 m / REF 1
S11 2 : 1. 1792 6. 000 000 000 GHz

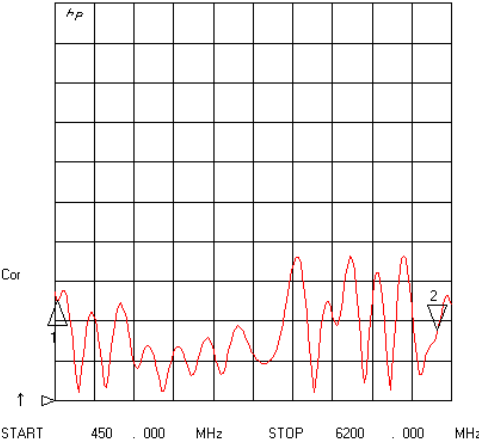


CH3 PHA 4 ° / REF 0 °
S12/M 2 : 160. 68 m ° 6. 000 000 000 GHz

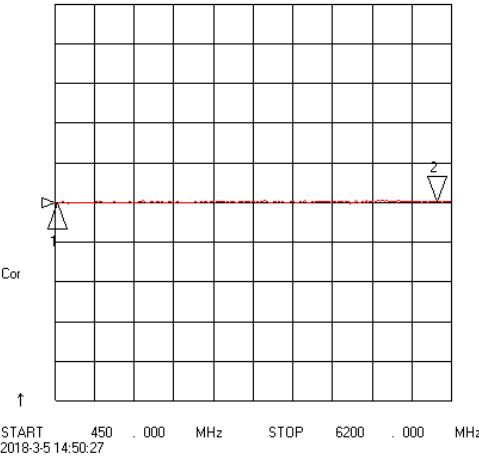

START 2018-3-5 14:50:27

CH2 LOG 2 dB / REF -6 dB
S21 2 : -7. 7120 dB 6. 000 000 000 GHz

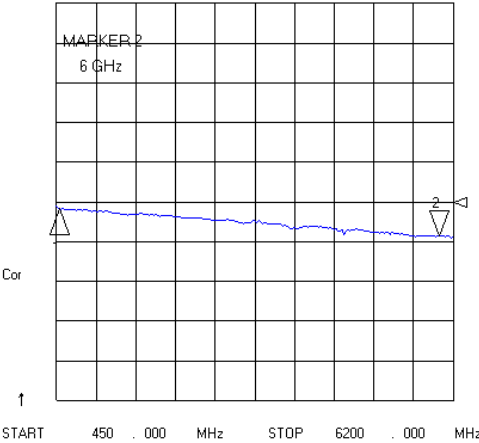

CH4 SWR 100 m / REF 1
S22 2 : 1. 1790 6. 000 000 000 GHz

