
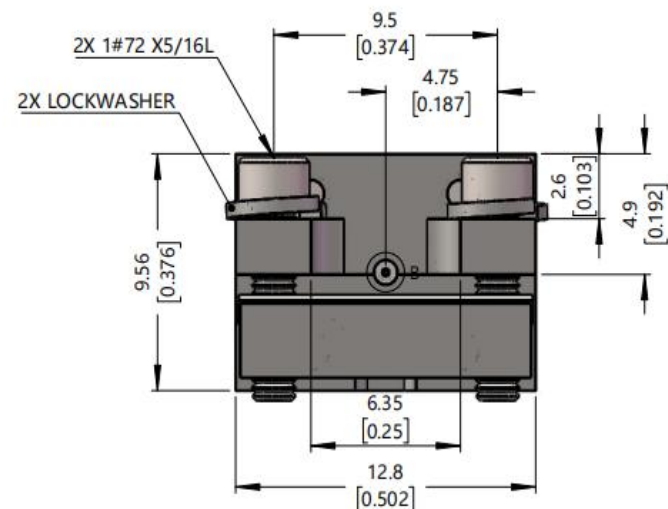
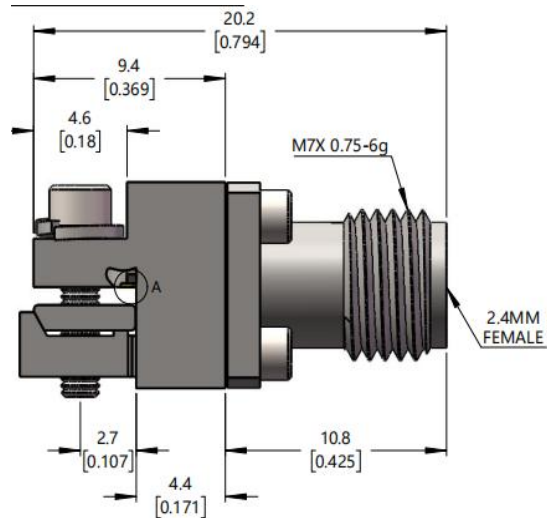


DETAIL A(20:1)

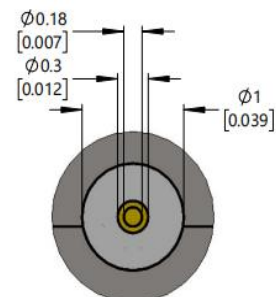

DETAIL B(20:1)

Electrical & Environmental Characteristics

Impedance	50 Ohm
Operating Frequency	DC-50 GHz
Connector	2.4mm Female
Insertion Loss	0.05* $\sqrt{f_GHz}$
VSWR	1.25 Typ
Interface	MIL-STD-348A
Operating Temperature	-40~+165 °C

Material & Coat-Plating

Contact	BeCu C17300 GOLD PLATE
Housing	SUS303
Bead	PTFE
Item	MATERIAL & FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

APVD

PRODUCT
SPEC

APPLICATO
N SPEC

WEIGHT

CUSTOMER DRAWING

SIZE
A4

GAGE CODE
0T8L4

DRAWING NO

LAUFTEK

LT-2.4-DEL18
2.4mm FEMALE
END LAUNCH CONNECTOR

SCALE 4

SCALE 4: 1

SHEET1 OF 1

RVE 1