

Electrical Specifications:


Frequency Range:	10MHz-18GHz
Low Level Sensitivity:	> 0.4mV/uW
VSWR:	2.0:1 Max
Frequency Response:	± 1.0 dB
Max Input Power:	200 mW
Dynamic range:	40dB Min

Mechanical Specifications:

Operation Temperature:	-20°C - +70°C
Storage Temperature:	-40°C - +85°C
Body Material:	Stainless Steel 303
Center conductor:	Becu, Golden
Input Connectors:	SMA Male
Output Connectors:	SMA Female
Relative Humidity:	0 ~ 90%

Outline Drawing:

Unit: mm

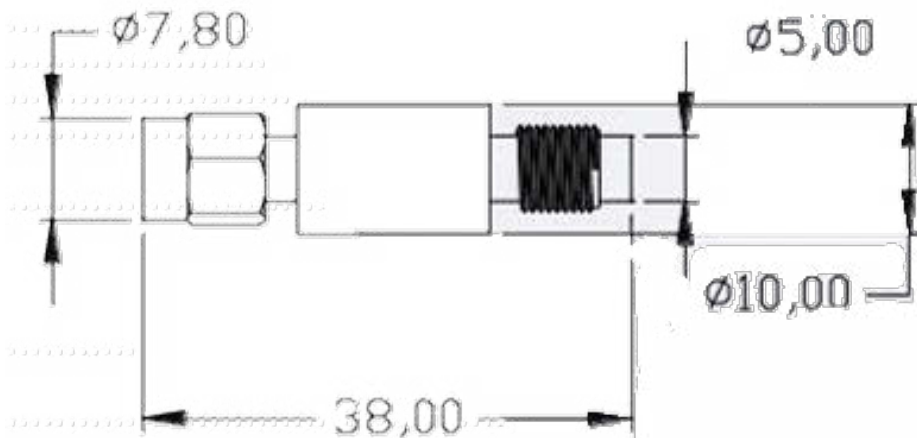

Typical Performance Data:

