

Model: LT-MT2-27-3.5-S-F
Coaxial Termination
DC-27GHz/3.5mm Female/2W
sales@lauftex.ru | lauftex.ru



Features:

- Operating Frequency DC to 27 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment




Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		27	GHz
VSWR			1.15	:1
Power Handling			2	W
Impedance		50		Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-55 To +125	°C
Storage Temerature	-55 to +125	°C
Body Material	Stainless Steel 303	
Center Conductor	Becu, Golden	
Connectors	3.5mm Female	
Relative Humidity	≤90%	

Outline Drawing: Unit:mm

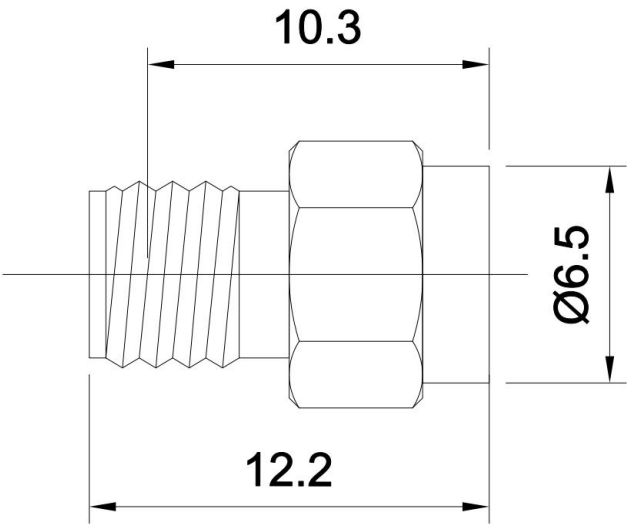

Typical Performance Data:

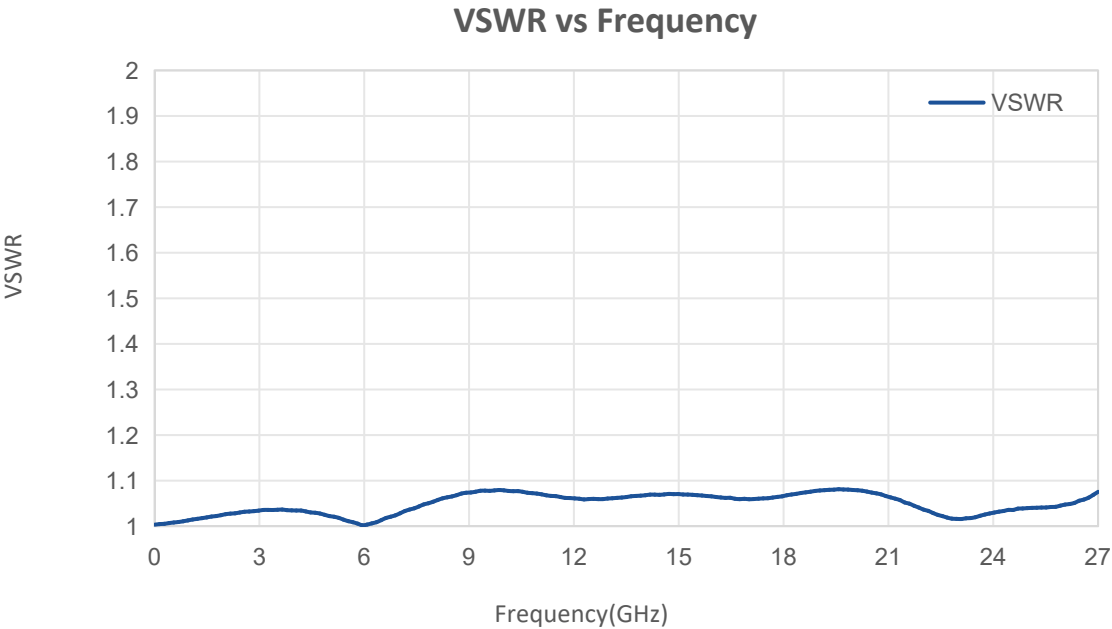

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.