

LT-MT2-6-BNC
DC-6GHz, 2W, BNC Male Coaxial Fixed
Termination
sales@lauftex.ru | lauftex.ru

LAUFTEK

ELECTRICAL

- **Frequency Range** DC - 6 GHz
- **VSWR** DC - 6GHz.....<1.3;
- **Power Handling:** $\leq 2W$
- **Impedance** 50 Ohms

MECHANICAL


Operation Temperature: $-55^{\circ}C \sim +100^{\circ}C$

Storage Temperature: $-55^{\circ}C \sim +100^{\circ}C$

Connectors: BNC-Male

Material: Nickel plated Brass

Outline Drawing

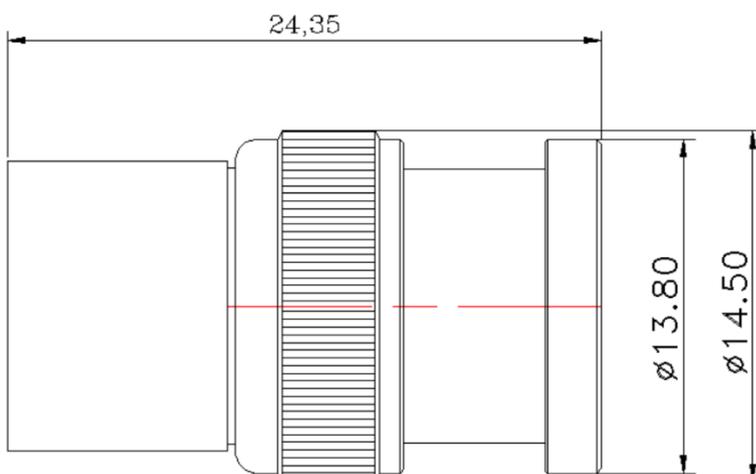

Unit: mm