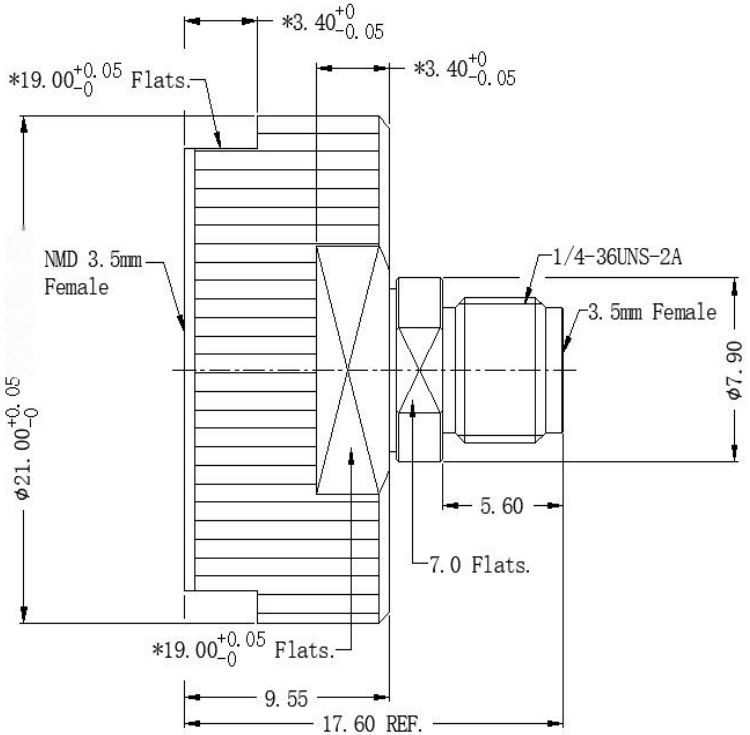

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~26.5GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.20
Insertion Loss	≤0.50dB
Operating Temperature	- 55~+125℃
Material & Coat-Plating	
Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

LUFTEK

Unit mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±-
3 PLC ±-
ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

Product Model

LT-NMD3.5F-3.5F
NMD 3.5mm Female to 3.5mm Female adaptor

MATEIAL SEE TABLE

FINISH SEE TABLE

WEIGHT

SIZE A4

GAGE CODE 0T8L4

DRAWING NO

CUSTOMER DRAWING

SHEET1 OF 1

RVE 1