


MT Series
SEMI-RIGID ALTERNATIVE FLEXIBLE CABLE
sales@lauftex.ru | lauftex.ru

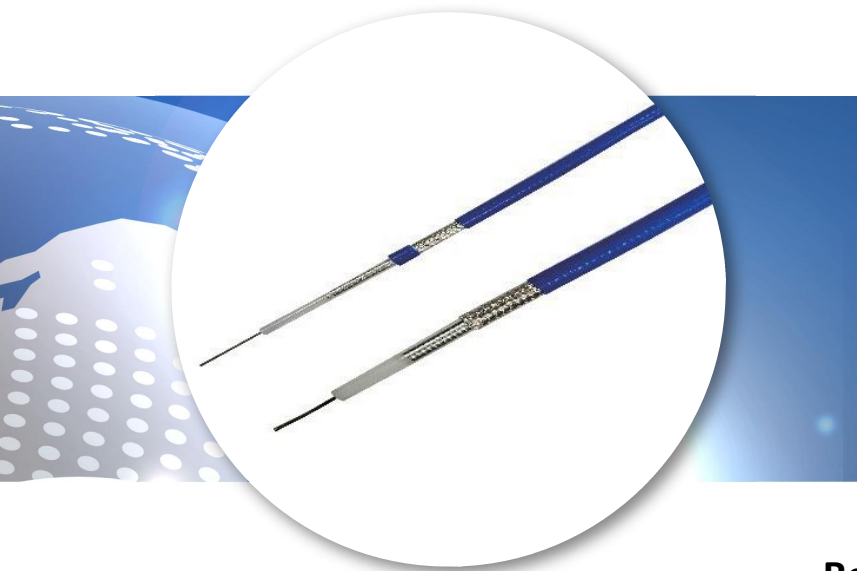

The LAUFTEX MT Series delivers exceptional performance comparable to semi-rigid cable solutions, while offering enhanced flexibility and practicality for engineering applications.

Key Features:

Superior Construction: Features industry-leading SPC (Spiral Protective Cover) spiral wrap as the outer conductor, providing exceptional shielding and protection against external interference.

Robust Dielectric System: Utilizes high-quality PTFE (Polytetrafluoroethylene) combined with SPC tape braid, ensuring outstanding electrical properties and long-term durability.

Universal Compatibility: Maintains standardized cable dimensions and structure, enabling seamless integration with both semi-rigid and semi-flexible connectors.

Replacement Table


● Typical Application

- Maximum operating frequency up to 67GHz
- Excellent shielding
- Excellent corrosion resistance
- Good mechanical stability
- Cost-effective

● Features

- Test setup
- Phased array radars interconnection
- Cabinet jumper
- Equipment automation
- High-power operating environment

LAUFTEX MODEL	REPLACEMENT MODEL	REPLACEMENT BRAND
MT1	TFLEX-405	TIMES
	MULTIFLEX86	H+S
	MULTIBEND86	HABIA
	SS405	HARBOUR
MT2	TFLEX402	TIMES
	MULTIFLEX141	H+S
	MULTIBEND141	HABIA
	SS402	HARBOUR







- 1—Center Conductor—SPC(Silver Plated Copper)
- 2—Dielectric—Solid state PTFE
- 3—Outer Conductor—SPC(Silver Plated Copper)
- 4—Outer Shield—SPC(Silver Plated Copper)
- 5—FEP Jacket—FEP


Cable Specification

Mode	MT0		MT1		MT2		MT3	
Mechanical Specifications								
Center Conductor (mm)	0.3		0.51		0.91		1.65	
Dielectric (mm)	0.94		1.60		3.00		5.25	
Inner Shield (mm)	1.06		1.79		3.20		5.57	
Outer Shield (mm)	1.3		2.16		3.60		6.08	
Jacket (mm)	1.6		2.80		4.00		6.50	
Electrical Specifications								
Impedance(Ω)	50		50		50		50	
Velocity of Propagation(%)	70		70		70		70	
Shielding Effectiveness (dB)	< -90		< -90		< -90		< -90	
Time Delay (ns/m)	4.76		4.76		4.76		4.76	
Capacitance (pF/m)	98.3		99.2		95.1		98.0	
Cut-off Frequency(GHz)	110		63		34		19	
Voltage Withstand(V,DC)	450		800		1500		2600	
Static Bending Radius (mm)	7		14		20		33	
Dynamic Bending Radius (mm)	14		28		40		65	
Operating Temperature (°C)	-55~165		-55~165		-55~165		-55~165	
Attenuation(+25°C Ambient)&Power Handling(+40°C Ambient;SeaLevel;VSWR 1:1)								
Frequency (MHz)	dB/100	KW	dB/100m	KW	dB/100m	KW	dB/100m	KW
500	87.41	0.036	48.19	0.144	26.17	0.390	17.37	1.743
1000	124.00	0.025	69.30	0.100	38.17	0.267	25.72	1.177
2000	176.15	0.018	100.31	0.069	56.28	0.181	38.69	0.783
4000	250.67	0.012	146.47	0.047	84.20	0.121	59.32	0.510
6000	308.48	0.010	183.73	0.038	107.46	0.095	76.99	0.393
8000	357.63	0.009	216.06	0.032	128.61	0.079	93.1	0.140
12000	440.95	0.007	273.66	0.025	165.81	0.062	122.72	0.126
16000	512.02	0.006	324.44	0.021	199.91	0.051	150.14	0.110
18000	544.46	0.006	348.17	0.020	216.09	0.047	163.30	0.094
20000	575.28	0.005	371.05	0.019	231.81	0.044		
26500	666.83	0.005	440.80	0.016	280.53	0.036		
40000	829.20	0.004	570.87	0.012				
50000	934.11	0.003						
K1	3.8791178		2.0669291		1.0824		0.688976	
K2	0.0013343		0.003937		0.003937		0.003937	

Test Data

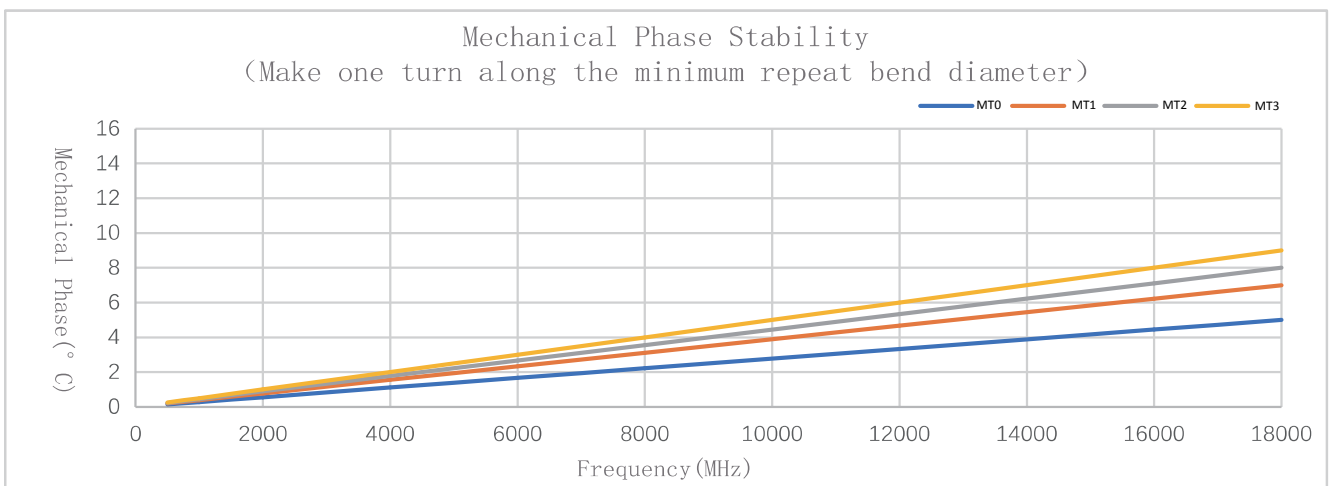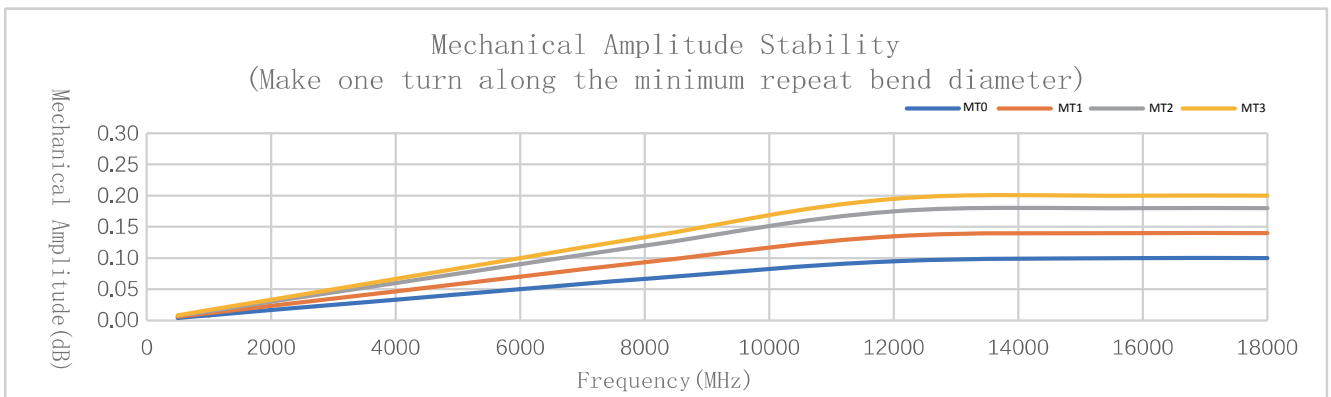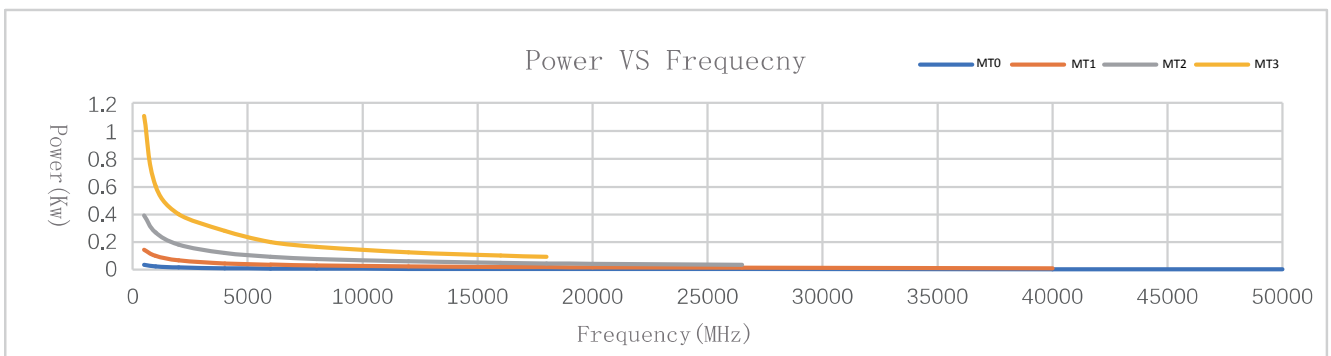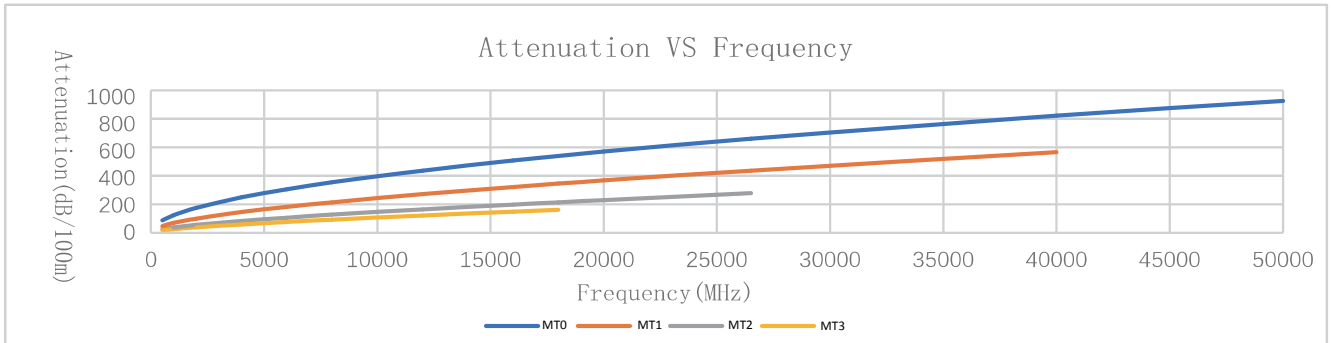

Assembly Selection Information

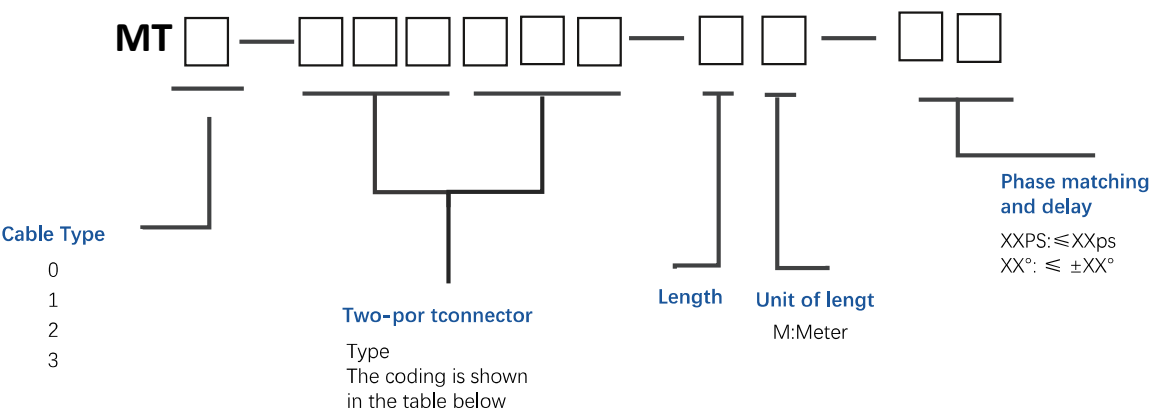

Optional Connectors

Connector Code	Connector Type	Operating Frequency	MT0	MT1	MT2	MT3	VSWR (Max)
2.4M	2.4mm Male	DC-40GHz	●				1.35
2.92M	2.92mm Male	DC-40GHz	●	●			1.30
2.92F	2.92mm Female	DC-40GHz	●	●			1.30
SSMAM	SSMA Male	DC-40GHz		●			1.30
3.5	3.5mm Male	DC-27GHz			●		1.30
SMAM	SMA Male	DC-27GHz		●	●	●	1.25
SMAWM	SMA Male Right Angle	DC-18GHz		●	●		1.25
SMAF	SMA Female	DC-27GHz		●		●	1.25
NM	N Male	DC-18GHz		●	●	●	1.25
NF	N Female	DC-18GHz		●	●	●	1.25
TNCM	TNC Male	DC-12GHz		●			1.25
SMPF	SMP Female	DC-40GHz		●			1.25
SSMPF	SSMP Female	DC-40GHz		●			1.25