

Model: TDC8225-4, 5MHz-40GHz, 2.92mm DC Block

ELECTRICAL SPECIFICATIONS:


- Frequency: 5MHz-40GHz
- Insertion Loss: 0.5 Db Max
- VSWR: 1.35Max
- DC Voltage: 250 VOLTS
- Impedance: 50 OHMS



MECHANICAL SPECIFICATIONS:

- Operation Temperature: $-55 \sim +100^{\circ}\text{C}$
- Storage Temperature: $-55 \sim +125^{\circ}\text{C}$
- Body Material: Passivated Stainless Steel
- Center conductor: Becu, Golden
- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Female
- Relative Humidity: 0 ~ 90%

OUTLINE DRAWINGS:

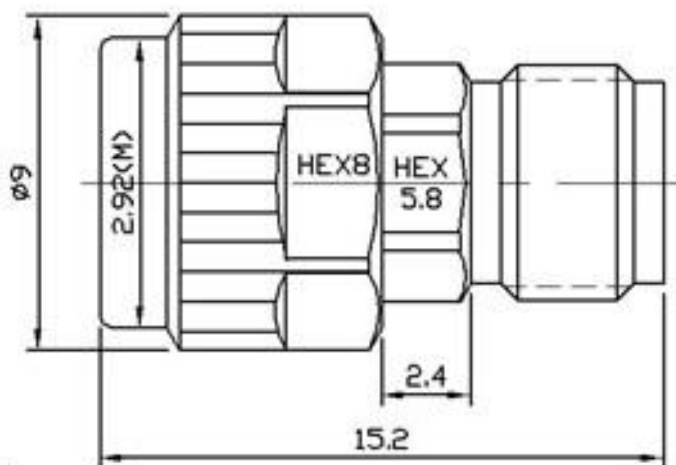

Unit: mm