

ATTENUATORS, DC-26.5 GHz, 3.5mm (Male to Female), 100W

Model: LF-A100-XX-3.5MF-26.5G


ELECTRICAL SPECIFICATIONS:

Frequency Range (GHz)	DC-26.5 GHz
Attenuation (dB):	10.....2.2/+2.8dB
	20.....1.5/+2.5dB
	30.....1.5/+1.5 dB
	40.....1.5/+1.5dB
VSWR (MAX)	DC – 26.5GHz 1.45:.....1
Impedance	50 Ohms
RF Power Rating	100Watts Average at 25°C

MECHANICAL SPECIFICATIONS:

Operation Temperature	-55°C - +100°C
Connectors	Passivated Stainless Steel or Brass , Gold Plated
Connector Pins	Beryllium Copper, Gold Plated
Body	Black, Finned Aluminum

OUTLINE DRAWING: Unit: mm

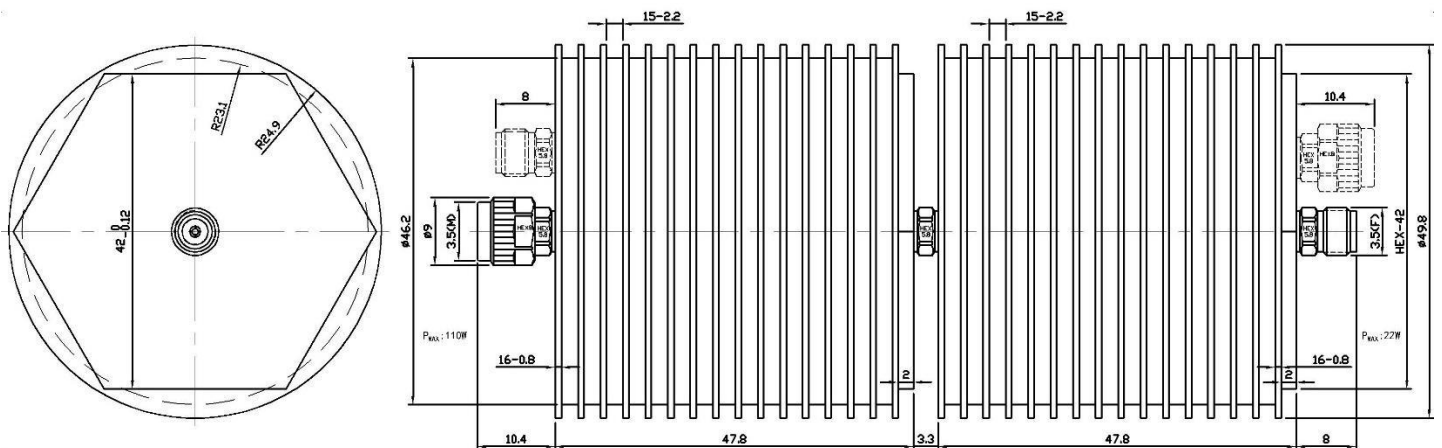

ORDERING INFORMATION:

MODEL NUMBER LF-A100-XX-3.5MF-26.5G

↓
dB value