Model: LT-MT2-27-3.5-S
Coaxial Termination
DC27 GHz/ 3.5mm Male/ 2W
sales@lauftex.ru | lauftex.ru

Features:

- Operating Frequency DC to 27 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		27	GHz
VSWR			1.15	:1
Power Handling			2	W
Impedance		50		Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-55 To +125	℃
Storage Temerature	-55 to +125	℃
Body Material	Stainless Steel 303	
Center Conductor	Becu, Golden	
Connectors	3.5mm Male	
Relative Humidity	≤90%	

Model: LT-MT2-27-3.5-S
sales@lauftex.ru | lauftex.ru

Outline Drawing:

Unit:mm

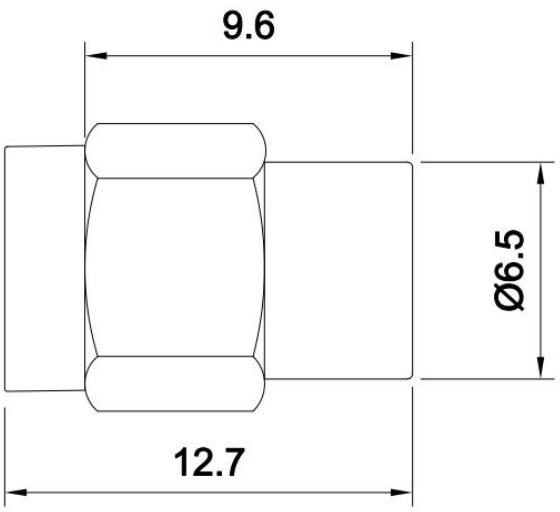

Typical Performance Data:

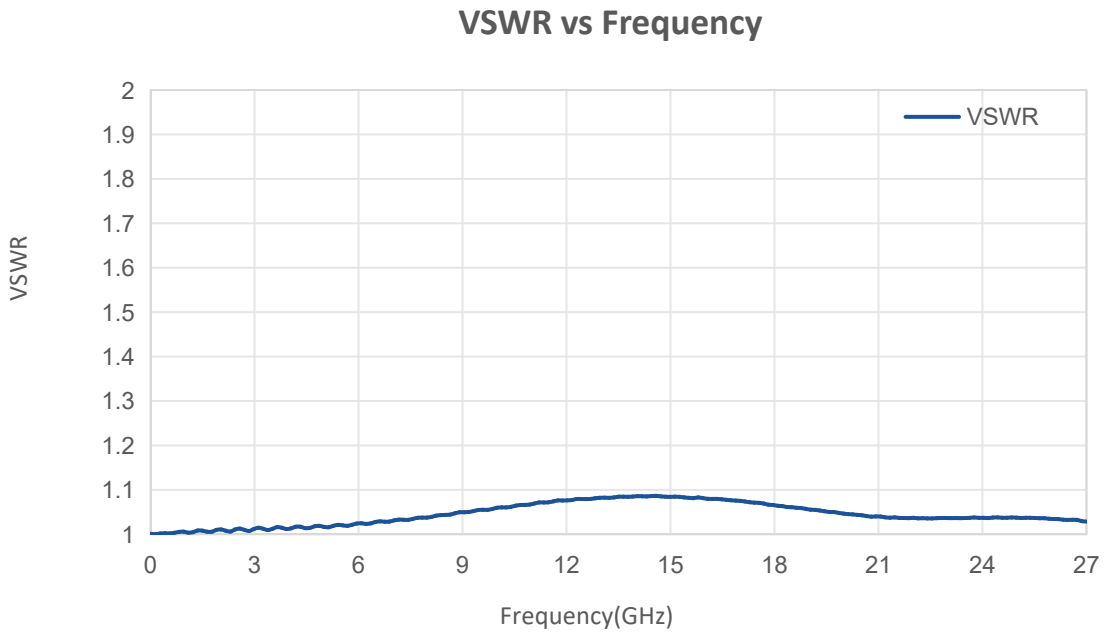

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.