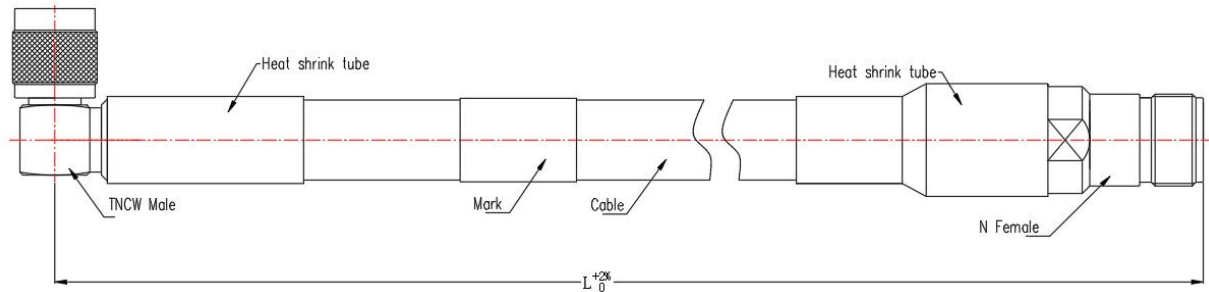


Cable Assembly	Product Specification	Product Mode
		LT-400-TNCM-NF-2M
Sketch Map:		
		
Electrical & Mechanical Characteristics		
Impedance	50 Ohm	
Insulation Resistance	5000(MΩ)	
Operating Frequency	DC-3GHz	
Dielectric Withstanding Voltage	2500V	
VSWR	≤1.35	
Insertion Loss	≤0.66dB	
Velocity Of Propagation	85%	
Min. Bending Radius Static	52 mm	
Operating Temperature	-40~+85℃	
Cable Diameter	10.29mm	
Material&Coat-Plating		
Cable Jacket	PE	
Connector Body	Nickel plated brass	
Connector Inner Conductor	Brass,Gold Plating	
Connector Nut	Nickel plated brass	
Connector Insulators	PTFE	